




# Food Transfer - FDA Liquid

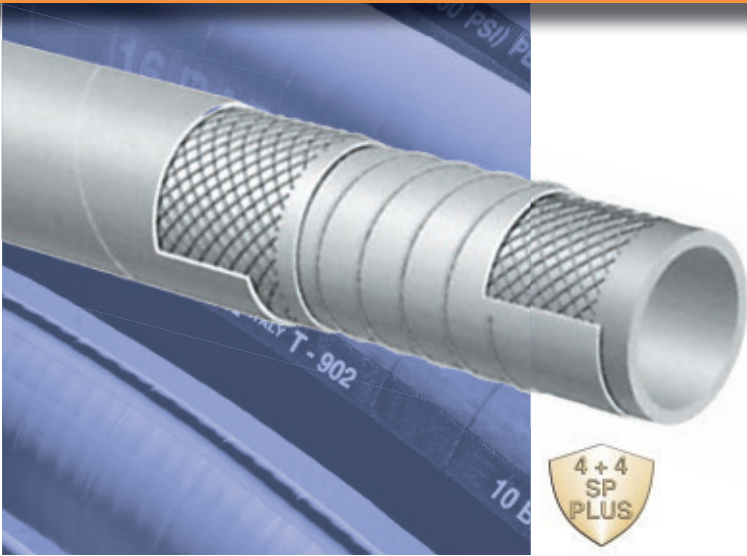

## T410LL Formerly T408LL 240 PSI Food & Beverage S & D Hose – Crush Resistant

### Applications:

Food and alcoholic beverage suction and discharge. Specially designed for wine, beer and spirits, up to 95 proof.

**Hose may be sterilized with steam at 226°F (+130°C) for 30 minutes or with 5% soda solution.**

★ **Not recommended for dry abrasive materials.**

### Cover:

White EPDM – abrasion and ozone resistant.

### Reinforcement:

High tensile textile cords with embedded **PET** helix.

### Tube:

White nontoxic CIIR. Meets FDA and 3A requirements.

### Working Pressure:

Constant Pressure – 16 Bar (240 PSI)

### Temperature Range:

-22°F (-30°C) to 176°F (+80°C)

### Branding:

ALFAGOMMA – ITALY T410 16 BAR (240 PSI) – FOOD SUCTION & DELIVERY – CRUSH RESISTANT (in black letters)

### Standard Length:

100 feet

## Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T410LL100	1	25	1.46	37	240	30	5	0.60
T410LL150	1 1/2	38	2.05	52	240	30	7 1/2	1.00
T410LL200	2	51	2.56	65	240	30	10	1.29
T410LL300	3	76	3.62	92	240	30	15	2.23

**CONSULT FOOD HOSE GUIDE FOR MATERIAL COMPATIBILITY ON PAGE 32 OF THE ALFAGOMMA INDUSTRIAL RUBBER HOSE CATALOG.**

### COUPLING SUGGESTIONS

Quick-Acting couplings attached with bands.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.