

T SERIES, 2" TUBULAR SCREW PLUG HEATERS							
WATTS	VOLTS	OVERALL LENGTH In./.(mm)	PIPE THREAD	304 SS	316 SS	TITANIUM	SHIP WGT. Lbs./.(kg)
1000	120	10	2	FT1110	ST1110	TT1110	11
	240	(254)		FT1210	ST1210	TT1210	(5)
2000	120	14	2	FT2114	ST2114	TT2114	14
	240	(356)		FT2214	ST2214	TT2214	(6.4)
	480			FT2414	ST2414	TT2414	
3000	240	19	2	FT3219	ST3219	TT3219	16
	480	(483)		FT3419	ST3419	TT3419	(7.3)
4000	240	23	2	FT4223	ST4223	TT4223	20
	480	(584)		FT4423	ST4423	TT4423	(9.1)
6000	240	33	2	FT6233	ST6233	TT6233	26
	480	(838)		FT6433	ST6433	TT6433	(11.8)
8000	240	40	2	FT8240	ST8240	TT8240	29
	480	(1016)		FT8440	ST8440	TT8440	(13.2)
9000	240	47	2	FT9247	ST9247	TT9247	32
	480	(1194)		FT9447	ST9447	TT9447	(14.5)
12000	240	61	2	FT12261	ST12261	TT12261	37
	480	(1549)		FT12461	ST12461	TT12461	(16.8)

Other sizes available, consult factory.



T Series Heater Features and Benefits

SUPERIOR CHEMICAL RESISTANCE:

- ♦ For use in most aqueous alkaline solutions, and plating and phosphate tanks. Check solution recommendation chart with your chemical supplier for proper sheath material selection.

RUGGED CONSTRUCTION:

- ♦ Heavy wall metal sheaths and screwplug available in:
304 stainless steel
316 stainless steel
Titanium

OUTSTANDING PERFORMANCE:

- ♦ Watt densities up to 35 watts per square inch (5.4 w/cm²) ensure long service life.

CORROSION RESISTANT HEAD:

- ♦ Vapor resistant, flame retardant polypropylene terminal enclosure with 3 ft (.9m) flexible PVC liquid tight conduit.

SAFETY FEATURES:

- ♦ Grounded construction.

CERTIFICATIONS: cULus listed (except steel) and CE compliant.

SIZES: 1,000 watts to 12,000 watts.


VOLTAGES:

- ♦ 120 to 600 volts.

OPTIONS AVAILABLE (consult factory):

- ♦ Special configurations and lengths.
- ♦ Explosion resistant enclosures.
- ♦ Longer wire and conduit lengths.
- ♦ Lower watt densities for highly viscous solutions.
- ♦ Temperature and level controls sized to match the heater.

DIMENSIONS

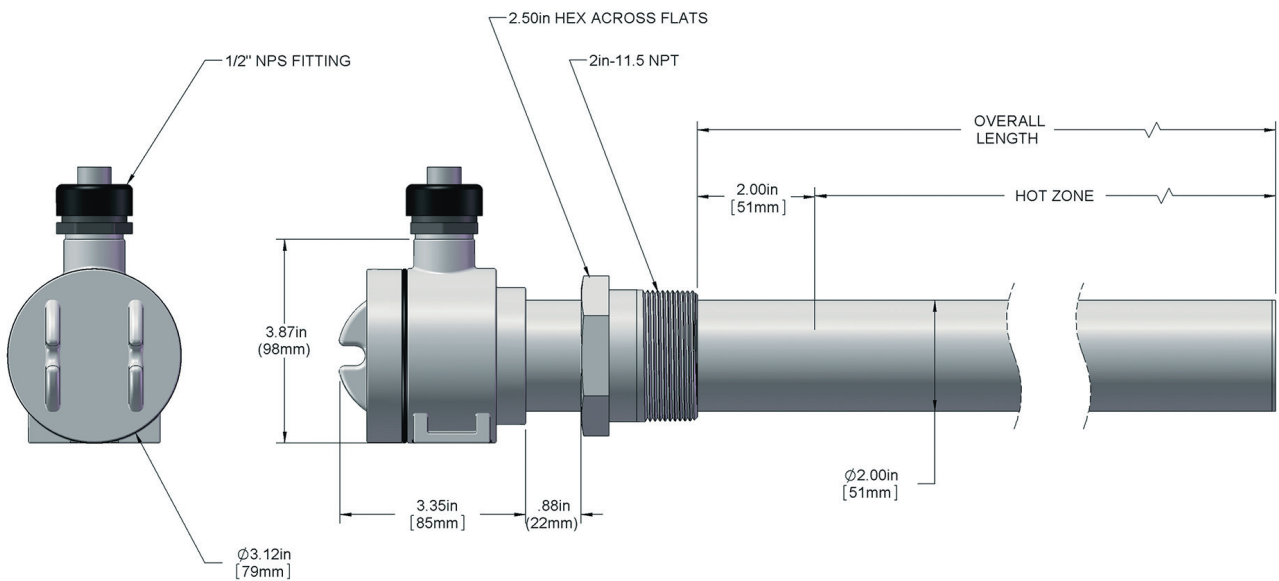

2" TUBULAR SCREW PLUG HEATER ORDERING INFORMATION

Series	Wattage	Voltage	Length (in.)	Options	Wire and Conduit Length
	1 = 1000	1 = 120	10 = 1kW	no designator = single phase power (standard) -3 = three phase power	
	2 = 2000	2 = 240	14 = 2kW		
	3 = 3000	3 = 380	19 = 3kW	no designator = 36" length standard specify variations from standard Ex: -X84 = 84"	
	4 = 4000	4 = 480	23 = 4kW		
	6 = 6000	5 = 415	33 = 6kW		
	8 = 8000	6 = 600	40 = 8kW		
	9 = 9000	7 = 400	47 = 9kW		
	12 = 12000	8 = 208	61 = 12kW		
		9 = 220	specify (custom		
		0 = 200	lengths available)		
	FT = 304 stainless steel ST = 316 stainless steel TT = titanium				

ORDERING EXAMPLE:

FT12261

304 stainless steel, 12,000 watts, 240 volts, 61" overall length.

**PROCESS
TECHNOLOGY**