



CPVC Schedule 80 Fittings



PRODUCT

Contact Spears® for any Information not found.



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Tees

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee

Socket x Socket x Socket



801-002C	1/4	50	300	090	29.28
801-003C	3/8	25	150	090	29.28
801-005C	1/2	25	200	090	29.28
801-007C	3/4	15	120	090	29.79
801-010C	1	25	0	090	36.52
801-012C	1-1/4	10	0	090	77.02
801-015C	1-1/2	10	0	090	88.23
801-020C	2	10	0	090	98.21
801-025C	2-1/2	10	0	090	249.98
801-030C	3	5	0	090	249.98
801-040C	4	5	0	090	332.69
801-050C	5	5	0	090	822.51
801-050CF	5	1	4	097	1784.22
801-060C	6	2	0	090	865.82
801-080C	8	2	0	090	2480.14
801-080CF	8	1	0	097	2196.41
801-100C	10	1	0	091	4906.45
801-100CF	10	1	0	097	3648.49
801-120C	12	1	0	091	7582.86
801-120CF	12	1	0	097	4979.41
801-140C	14	1	0	095	11274.36
801-140CF	14	1	0	097	9248.36
801-160CF	16	1	0	097	11201.71
801-180CF	18	1	0	097	15043.88
801-200CF	20	1	0	097	20282.70
801-240CF	24	1	0	097	32539.06

Tee - Reducing

Socket x Socket x Socket



801-101C	3/4X1/2	15	120	090	65.29
801-130C	1X1/2	15	0	090	75.29
801-131C	1X3/4	15	0	090	75.29
801-157C	1-1/4X1X3/4	12	0	090	143.09
801-158C	1-1/4X1X1	15	0	090	93.37
801-159C	1-1/4X1X1-1/4	15	0	090	93.37
801-166C ¹	1-1/4X1/2	10	0	090	172.64
801-167C	1-1/4X3/4	12	0	090	147.34
801-168C	1-1/4X1	15	0	090	147.34
801-202C	1-1/2X1-1/4X1	10	0	090	147.34
801-209C	1-1/2X1/2	10	0	090	153.88
801-210C	1-1/2X3/4	15	0	090	153.88
801-211C	1-1/2X1	10	0	090	153.88
801-212C	1-1/2X1-1/4	10	0	090	153.88
801-247C	2X1/2	10	0	090	183.31
801-248C	2X3/4	10	0	090	183.31
801-249C	2X1	10	0	090	183.31

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Reducing (continued)

Socket x Socket x Socket

801-250C	2X1-1/4	10	0	090	183.31
801-251C	2X1-1/2	10	0	090	183.31
801-254C ¹	2X2X4	4	0	090	710.24
801-287C	2-1/2X1/2	10	0	090	210.51
801-288C	2-1/2X3/4	10	0	090	210.51
801-289C	2-1/2X1	10	0	090	210.51
801-290C	2-1/2X1-1/4	10	0	090	210.51
801-291C	2-1/2X1-1/2	10	0	090	210.51
801-292C	2-1/2X2	10	0	090	217.91
801-333C ¹	3X1/2	5	0	090	463.33
801-334C ¹	3X3/4	6	0	090	463.33
801-335C	3X3X1	5	0	090	374.00
801-336C ¹	3X1-1/4	5	0	090	448.60
801-337C	3X3X1-1/2	5	0	090	374.00
801-338C	3X2	5	0	090	374.00
801-339C	3X2-1/2	6	0	090	374.00
801-415C ¹	4X1/2	5	0	090	568.80
801-416C ¹	4X3/4	5	0	090	568.80
801-417C	4X1	5	0	090	568.80
801-418C ¹	4X1-1/4	5	0	090	568.80
801-419C	4X1-1/2	5	0	090	568.80
801-420C	4X2	5	0	090	472.72
801-421C ¹	4X2-1/2	5	0	090	636.08
801-422C	4X3	5	0	090	472.72
801-426C ¹	4X6	4	0	090	1638.67
801-484C ¹	5X1-1/2	4	0	090	1567.43
801-486C ¹	5X2	4	0	090	1586.88
801-486CF	5X2	1	4	097	1103.81
801-487CF	5X2-1/2	1	4	097	730.88
801-488C ¹	5X3	4	0	090	1598.80
801-490C ¹	5X4	4	0	090	1608.34
801-490CF	5X4	1	4	097	935.01
801-523C ¹	6X1/2	4	0	090	1625.96
801-524C ¹	6X3/4	5	0	090	1625.96
801-525C	6X1	6	0	090	1625.96
801-525CF	6X1	1	3	097	739.43
801-526C ¹	6X1-1/4	4	0	090	1625.96
801-526CF	6X1-1/4	1	3	097	900.69
801-527C ¹	6X1-1/2	4	0	090	1625.96
801-527CF	6X1-1/2	1	4	097	842.74
801-528C	6X2	6	0	090	1510.71
801-528CF	6X2	1	4	097	883.23
801-529C ¹	6X2-1/2	4	0	090	1667.79
801-529CF	6X2-1/2	1	3	097	921.48
801-530C ¹	6X3	5	0	090	1510.71
801-530CF	6X3	1	3	097	965.88
801-532C	6X4	5	0	090	1335.06
801-575C ¹	8X1	2	0	090	2967.45
801-575CF	8X1	1	3	097	1036.98
801-576CF	8X1-1/4	1	0	097	1053.44
801-577CF	8X1-1/2	1	0	097	1061.26
801-578C ¹	8X2	2	0	090	2822.49
801-578CF	8X2	1	2	097	1180.63
801-579CF	8X2-1/2	1	2	097	1283.12

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Tees

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Reducing (continued)

Socket x Socket x Socket

801-580C ¹	8X3	2	0	090	2822.49
801-580CF	8X3	1	2	097	1447.93
801-582C ¹	8X4	2	0	090	2822.49
801-582CF	8X4	1	2	097	1557.93
801-585C	8X6	2	0	090	2450.80
801-618CF	10X1	1	0	097	1616.11
801-619CF	10X1-1/4	1	0	097	1639.31
801-620CF	10X1-1/2	1	0	097	1714.87
801-621C ¹	10X2	1	0	091	4940.84
801-621CF	10X2	1	0	097	1629.62
801-622CF	10X2-1/2	1	0	097	2021.13
801-623C ¹	10X3	1	0	091	4688.78
801-623CF	10X3	1	0	097	2196.03
801-624C ¹	10X4	1	0	091	4688.78
801-624CF	10X4	1	0	097	2321.27
801-626C	10X6	1	0	091	4317.76
801-626CF	10X6	1	0	097	2544.42
801-628C ¹	10X8	1	0	091	7063.76
801-628CF	10X8	1	0	097	2951.31
801-661CF	12X2	1	0	097	2765.58
801-662CF	12X2-1/2	1	0	097	2900.18
801-663CF	12X3	1	0	097	3050.25
801-664C ¹	12X4	1	0	091	8505.14
801-664CF	12X4	1	0	097	3176.32
801-666C ¹	12X6	1	0	091	7966.32
801-666CF	12X6	1	0	097	3446.53
801-668C	12X8	1	0	091	6746.60
801-668CF	12X8	1	0	097	3858.41
801-670C ¹	12X10	1	0	091	10295.46
801-670CF	12X10	1	0	097	4453.02
801-691CF	14X2	1	0	097	7054.01
801-692CF	14X2-1/2	1	0	097	7315.62
801-693CF	14X3	1	0	097	8232.64
801-694CF	14X4	1	0	097	8532.51
801-696CF	14X6	1	0	097	9292.46
801-698C ¹	14X8	1	0	095	8280.01
801-698CF	14X8	1	0	097	10025.40
801-700C ¹	14X10	1	0	095	8834.18
801-700CF	14X10	1	0	097	10965.81
801-702C	14X12	1	0	095	9907.49
801-702CF	14X12	1	0	097	12055.54
801-751CF	16X2	1	0	097	8100.38
801-752CF	16X2-1/2	1	0	097	8216.33
801-753CF	16X3	1	0	097	8443.44
801-754CF	16X4	1	0	097	8757.12
801-756CF	16X6	1	0	097	11404.41
801-758CF	16X8	1	0	097	12748.44
801-760CF	16X10	1	0	097	13799.22
801-762CF	16X12	1	0	097	15434.32
801-764CF	16X14	1	0	097	17147.66
801-781CF	18X2	1	0	097	11011.77

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Reducing (continued)

Socket x Socket x Socket

801-783CF	18X3	1	0	097	11407.08
801-784CF	18X4	1	0	097	11000.08
801-786CF	18X6	1	0	097	14884.67
801-788CF	18X8	1	0	097	15982.40
801-790CF	18X10	1	0	097	17177.27
801-792CF	18X12	1	0	097	18368.32
801-794CF	18X14	1	0	097	19384.83
801-796CF	18X16	1	0	097	20466.84
801-814CF	20X4	1	0	097	22647.38
801-816CF	20X6	1	0	097	26949.85
801-818CF	20X8	1	0	097	27825.19
801-820CF	20X10	1	0	097	30245.77
801-822CF	20X12	1	0	097	31713.85
801-824CF	20X14	1	0	097	35332.20
801-826CF	20X16	1	0	097	38167.12
801-828CF	20X18	1	0	097	40548.33
801-904CF	24X4	1	0	097	28066.59
801-906CF	24X6	1	0	097	30270.00
801-908CF	24X8	1	0	097	30991.78
801-910CF	24X10	1	0	097	32664.29
801-912CF	24X12	1	0	097	34333.02
801-914CF	24X14	1	0	097	37309.68
801-916CF	24X16	1	0	097	43816.80
801-918CF	24X18	1	0	097	48710.12
801-920CF	24X20	1	0	097	54098.71

¹ Sized with Bushing

Tee



Socket x Socket x Fipt

802-002C	1/4	25	150	090	74.32
802-005C	1/2	20	120	090	74.32
802-007C	3/4	20	160	090	99.13
802-010C	1	15	0	090	123.85
802-012C	1-1/4	15	0	090	145.59
802-015C	1-1/2	10	0	090	145.59
802-020C	2	10	0	090	182.84
802-025C	2-1/2	5	0	090	903.46
802-030C	3	5	0	090	217.93
802-040C	4	5	0	090	409.44
802-060CF	6	1	2	097	837.92
802-080CF	8	1	2	097	1688.87

Tee - Reducing



Socket x Socket x Fipt

802-101C	3/4X1/2	15	60	090	46.07
802-130C	1X1/2	50	0	090	92.48
802-131C	1X3/4	15	0	090	92.48
802-166C	1-1/4X1/2	25	0	090	159.38
802-167C ¹	1-1/4X3/4	15	0	090	159.38



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Tees

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Reducing (continued)

Socket x Socket x Fipt

802-168C	1-1/4X1	10	0	090	159.38
802-209C ¹	1-1/2X1/2	25	0	090	235.68
802-210C ¹	1-1/2X3/4	20	0	090	235.68
802-211C ¹	1-1/2X1	10	0	090	235.68
802-212C	1-1/2X1-1/4	10	0	090	235.68
802-247C	2X1/2	10	0	090	295.73
802-248C	2X3/4	10	0	090	295.73
802-249C	2X1	10	0	090	295.73
802-250C ¹	2X1-1/4	10	0	090	295.73
802-251C ¹	2X1-1/2	10	0	090	295.73
802-287C	2-1/2X1/2	10	0	090	388.48
802-288C ¹	2-1/2X3/4	10	0	090	388.48
802-289C ¹	2-1/2X1	10	0	090	388.48
802-290C ¹	2-1/2X1-1/4	10	0	090	388.48
802-291C ¹	2-1/2X1-1/2	10	0	090	388.48
802-292C ¹	2-1/2X2	10	0	090	428.82
802-333C ¹	3X1/2	5	0	090	657.20
802-334C ¹	3X3/4	5	0	090	657.20
802-335C ¹	3X1	5	0	090	657.20
802-336C ¹	3X1-1/4	5	0	090	657.20
802-337C ¹	3X1-1/2	5	0	090	657.20
802-338C ¹	3X2	5	0	090	657.20
802-339C ¹	3X2-1/2	5	0	090	657.20
802-415C ¹	4X1/2	5	0	090	1100.63
802-416C ¹	4X3/4	5	0	090	1100.63
802-417C ¹	4X1	5	0	090	1100.63
802-418C ¹	4X1-1/4	5	0	090	1100.63
802-419C ¹	4X1-1/2	5	0	090	1100.63
802-420C ¹	4X2	5	0	090	1100.63
802-421C ¹	4X2-1/2	5	0	090	1100.63
802-422C ¹	4X3	5	0	090	1100.63
802-525C ¹	6X1	4	0	090	2145.94
802-526C ¹	6X1-1/4	4	0	090	2145.94
802-527C ¹	6X1-1/2	4	0	090	2145.94
802-528C ¹	6X2	4	0	090	2145.94
802-529C ¹	6X2-1/2	4	0	090	2145.94
802-530C ¹	6X3	4	0	090	2145.94
802-532C ¹	6X4	2	0	090	2463.29
802-578C ¹	8X2	2	0	090	4080.67
802-580C ¹	8X3	2	0	090	4080.67
802-582C ¹	8X4	2	0	090	4080.67
802-621C ¹	10X2	1	0	091	5985.71
802-623C ¹	10X3	1	0	091	5985.71
802-624C ¹	10X4	1	0	091	5985.71
802-661C ¹	12X2	1	0	091	9931.43
802-663C ¹	12X3	2	0	091	9931.43
802-664C ¹	12X4	1	0	091	9931.43

¹ Sized with Bushing

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Special Reinforced



Socket x Socket x SR Fipt - Stainless Steel Collar

802-005CSR	1/2	50	0	096	40.67
802-007CSR	3/4	15	120	096	59.45
802-010CSR	1	15	0	096	74.78
802-012CSR	1-1/4	15	0	096	86.76
802-015CSR	1-1/2	10	0	096	86.76
802-020CSR	2	10	0	096	141.82
802-030CSR	3	5	0	096	204.23
802-040CSR	4	5	0	096	384.76

Tee - Special Reinforced Reducing



Socket x Socket x SR Fipt - Stainless Steel Collar

802-072CSR	1/2X1/4	25	200	096	40.67
802-098CSR	3/4X1/4	25	100	096	54.34
802-101CSR	3/4X1/2	50	0	096	54.34
802-128CSR ¹	1X1/4	15	0	096	83.96
802-130CSR	1X1/2	50	0	096	33.23
802-131CSR	1X3/4	15	0	096	83.96
802-164CSR ¹	1-1/4X1/4	5	0	096	111.62
802-166CSR	1-1/4X1/2	15	0	096	88.42
802-168CSR	1-1/4X1	10	0	096	90.25
802-207CSR ¹	1-1/2X1/4	15	0	096	159.87
802-211CSR	1-1/2X1	10	0	096	105.98
802-212CSR	1-1/2X1-1/4	10	0	096	105.98
802-245CSR ¹	2X1/4	10	0	096	183.60
802-247CSR	2X1/2	10	0	096	165.29
802-248CSR	2X3/4	10	0	096	183.60
802-287CSR	2-1/2X1/2	10	0	096	126.27
802-331CSR ¹	3X1/4	5	0	096	350.73
802-413CSR ¹	4X1/4	5	0	096	380.57

¹ Sized with Bushing

Tee - Brass Transition



Socket x Socket x Fipt With Brass Thread Insert

802-005CBR	1/2	20	120	096	120.67
802-007CBR	3/4	20	80	096	241.40

Not intended to convey or dispense water for human consumption through drinking or cooking

Tee - Brass Transition Reducing



Socket x Socket x Fipt With Brass Thread Insert

802-101CBR	3/4X1/2	50	0	096	149.62
------------	---------	----	---	-----	--------

Not intended to convey or dispense water for human consumption through drinking or cooking

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Tees

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Reducing

Socket x Fipt x Socket



803-095C	3/4X1/2X3/4	50	0	090	41.22
----------	-------------	----	---	-----	-------

Tee - Special Reinforced Reducing

Socket x SR Fipt - Stainless Steel Collar x Socket



(See also Gauge & Instrument Fittings for additional configurations)

803-095CSR	3/4X1/2X3/4	15	0	096	33.48
------------	-------------	----	---	-----	-------

Tee

Fipt x Fipt x Fipt



805-002C	1/4	25	150	090	65.03
805-003C	3/8	25	150	090	65.03
805-005C	1/2	20	120	090	65.03
805-007C	3/4	15	120	090	93.71
805-010C	1	15	0	090	100.93
805-012C	1-1/4	10	0	090	101.48
805-015C	1-1/2	10	0	090	106.60
805-020C	2	10	0	090	118.36
805-025C	2-1/2	5	0	090	582.09
805-030C	3	5	0	090	675.38
805-040C	4	5	0	090	1599.98
805-060CF ¹	6	1	2	090	2197.92
805-080CF ¹	8	1	0	090	4346.64

¹ Sized with Female Adapter

Tee - Special Reinforced

SR Fipt x SR Fipt x SR Fipt - Stainless Steel Collar



805-002CSR	1/4	25	150	096	36.42
805-003CSR	3/8	25	150	096	36.42
805-005CSR	1/2	25	150	096	48.67
805-007CSR	3/4	25	100	096	55.77
805-010CSR	1	15	0	096	83.29
805-015CSR	1-1/2	10	0	096	88.44
805-020CSR	2	10	0	096	105.31

Tee - Street

Spigot x Socket x Socket



844-005C	1/2	25	200	090	36.62
844-007C	3/4	15	120	090	37.26

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tee - Street (continued)

Spigot x Socket x Socket

844-010C	1	15	0	090	45.66
844-012C	1-1/4	10	0	090	96.27
844-015C	1-1/2	10	0	090	110.35
844-020C	2	10	0	090	122.83

90° Ells

90° Ell

Socket x Socket



806-002C	1/4	50	300	090	31.87
806-003C	3/8	25	150	090	31.87
806-005C	1/2	20	240	090	12.46
806-007C	3/4	20	160	090	15.96
806-010C	1	25	0	090	25.28
806-012C	1-1/4	10	0	090	54.75
806-015C	1-1/2	10	0	090	61.06
806-020C	2	25	0	090	73.73
806-025C	2-1/2	5	0	090	169.79
806-030C	3	6	0	090	192.22
806-040C	4	5	0	090	346.21
806-050C	5	4	0	090	660.88
806-050CF	5	1	4	097	870.24
806-060C	6	4	0	090	695.69
806-080C	8	2	0	090	1702.43
806-080CF	8	1	0	097	1234.76
806-100C	10	1	0	091	4549.58
806-100CF	10	1	0	097	2705.07
806-120C	12	1	0	091	6155.57
806-120CF	12	1	0	097	4979.96
806-140C	14	1	0	095	9612.97
806-140CF	14	1	0	097	9112.39
806-160CF	16	1	0	097	10784.57
806-180CF	18	1	0	097	14790.06
806-200CF	20	1	0	097	19305.04
806-240CF	24	1	0	097	30175.85

90° Ell - Sweep

Socket x Socket



806-005SC	1/2	25	150	090	24.59
806-007SC	3/4	25	100	090	31.67
806-010SC	1	20	0	090	50.88
806-012SC	1-1/4	25	0	090	67.24
806-015SC	1-1/2	20	0	090	72.24
806-020SC	2	25	0	090	87.51



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

90° Eells

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

90° Eell - Long Sweep

Socket x Socket

806-005LSCF	1/2	25	0	097	113.23
806-007LSCF	3/4	25	0	097	126.84
806-010LSCF	1	25	0	097	143.44
806-012LSCF	1-1/4	25	0	097	150.31
806-015LSCF	1-1/2	25	0	097	167.79
806-020LSCF	2	1	10	097	235.39
806-025LSCF	2-1/2	1	7	097	308.61
806-030LSCF	3	1	5	097	326.57
806-040LSCF	4	1	4	097	403.96
806-060LSCF	6	1	2	097	595.76
806-080LSCF	8	1	0	097	1532.39
806-100LSCF	10	1	0	097	2335.03

Not Listed for Electrical Conduit Use

90° Eell

Socket x Fipt

807-002C	1/4	25	450	090	28.23
807-003C	3/8	25	150	090	28.23
807-005C	1/2	20	120	090	32.96
807-007C	3/4	20	160	090	38.71
807-010C	1	20	0	090	50.67
807-012C	1-1/4	10	40	090	74.32
807-015C	1-1/2	10	0	090	112.57
807-020C	2	10	0	090	144.51
807-030C	3	5	0	090	174.17
807-040C	4	5	0	090	329.33
807-060C	6	3	0	090	829.64

90° Eell - Special Reinforced

Socket x SR Fipt - Stainless Steel Collar

807-005CSR	1/2	20	240	096	19.75
807-007CSR	3/4	75	0	096	23.17
807-010CSR	1	50	0	096	27.93
807-012CSR	1-1/4	25	0	096	57.69
807-015CSR	1-1/2	10	0	096	69.34
807-020CSR	2	10	0	096	86.75
807-030CSR	3	5	0	096	126.24
807-040CSR	4	5	0	096	233.08

90° Eell - Brass Transition

Socket x Fipt With Brass Thread Insert

807-005CBR	1/2	20	240	096	106.13
------------	-----	----	-----	-----	--------



Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

90° Eell - Brass Transition (continued)

Socket x Fipt With Brass Thread Insert

807-007CBR	3/4	20	160	096	185.29
------------	-----	----	-----	-----	--------

Not intended to convey or dispense water for human consumption through drinking or cooking

90° Eell

Fipt x Fipt

808-002C	1/4	25	450	090	33.47
808-003C	3/8	25	150	090	33.47
808-005C	1/2	20	120	090	19.44
808-007C	3/4	20	120	090	29.05
808-010C	1	15	120	090	40.77
808-012C	1-1/4	10	40	090	78.60
808-015C	1-1/2	10	0	090	84.54
808-020C	2	10	0	090	113.31
808-025C	2-1/2	5	0	090	351.68
808-030C	3	5	0	090	377.14
808-040C	4	5	0	090	590.12

90° Street Eell

Mipt x Fipt

812-002C	1/4	50	300	090	47.68
812-005C	1/2	25	150	090	34.18
812-007C	3/4	25	150	090	41.58
812-010C	1	50	0	090	59.86

90° Eell - Special Reinforced

SR Fipt x SR Fipt - Stainless Steel Collar

808-003CSR	3/8	25	150	096	11.92
808-005CSR	1/2	20	120	096	11.92
808-007CSR	3/4	20	160	096	17.47
808-010CSR	1	50	0	096	22.40
808-012CSR	1-1/4	25	0	096	43.09
808-015CSR	1-1/2	10	0	096	50.75
808-020CSR	2	10	0	096	67.98

90° Street Eell

Spigot x Socket

809-005C	1/2	50	200	090	15.68
809-007C	3/4	50	0	090	19.93
809-010C	1	50	0	090	31.67
809-012C	1-1/4	25	0	090	68.45
809-015C	1-1/2	10	0	090	76.44
809-020C	2	25	0	090	92.23
809-025C ¹	2-1/2	5	0	090	186.22
809-030C	3	5	0	090	256.35



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



90° Ells

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

90° Street Ell (continued)

Spigot x Socket

809-040C	4	4	0	090	461.66
809-060C ¹	6	1	0	090	927.58
809-080C ¹	8	2	0	090	2269.94
809-100C ¹	10	1	0	091	6065.45
809-100CF	10	1	0	097	4280.51
809-120C ¹	12	1	0	091	8204.24
809-120CF	12	1	0	097	6602.49
809-140C ¹	14	1	0	095	11146.60
809-140CF	14	1	0	097	10094.52
809-160CF	16	1	0	097	15856.22
809-180CF	18	1	0	097	20170.22
809-200CF	20	1	0	097	47347.29
809-240CF	24	1	0	097	48354.42

¹ = Assembled with Molded Components



90° Ell - Reducing

Socket x Fipt

807-101C	3/4X1/2	10	60	090	31.61
807-130C ¹	1X1/2	10	80	090	45.17
807-131C ¹	1X3/4	10	60	090	45.17

¹ Sized with Bushing



90° Ell - Special Reinforced Reducing

Socket x SR Fipt - Stainless Steel Collar

807-101CSR	3/4X1/2	50	0	096	25.17
807-130CSR	1X1/2	50	0	096	27.14



90° Ell - Brass Transition Reducing

Socket x Fipt With Brass Thread Insert

807-101CBR	3/4X1/2	20	120	096	132.73
------------	---------	----	-----	-----	--------

Not intended to convey or dispense water for human consumption through drinking or cooking

Non 90° Ells

11-1/4° Ell

Socket x Socket

811-005CF	1/2	1	52	097	67.14
811-007CF	3/4	20	0	097	69.19
811-010CF	1	1	50	097	95.71
811-012CF	1-1/4	1	26	097	102.08
811-015C	1-1/2	25	0	090	76.34
811-020C	2	10	0	090	93.37



Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

11-1/4° Ell (continued)

Socket x Socket

811-025CF	2-1/2	1	25	097	231.16
811-030C	3	10	0	090	245.15
811-040C	4	4	0	090	336.55
811-050CF	5	1	4	097	429.38
811-060CF	6	1	5	097	646.32
811-080CF	8	1	3	097	1228.14
811-100CF	10	1	2	097	2038.65
811-120CF	12	1	2	097	2685.13
811-140CF	14	1	0	097	5701.34
811-160CF	16	1	0	097	8026.11
811-180CF	18	1	0	097	11635.61
811-200CF	20	1	0	097	17273.54
811-240CF	24	1	0	097	17470.35



30° Ell

Socket x Socket


815-005CF	1/2	1	25	097	67.14
815-007CF	3/4	1	25	097	69.19
815-010CF	1	1	20	097	95.71
815-012CF	1-1/4	1	15	097	102.08
815-015CF	1-1/2	1	25	097	110.07
815-020CF	2	1	25	097	206.93
815-025CF	2-1/2	1	18	097	231.16
815-030CF	3	1	10	097	257.85
815-040CF	4	1	18	097	336.74
815-050CF	5	1	4	097	369.73
815-060C	6	5	0	090	1036.76
815-080CF	8	1	3	097	1228.14
815-100CF	10	1	2	097	2038.65
815-120CF	12	1	2	097	2685.13
815-140CF	14	1	0	097	5701.34
815-160CF	16	1	0	097	8026.11
815-180CF	18	1	0	097	11635.61
815-200CF	20	1	0	097	11713.17
815-240CF	24	1	0	097	16454.59



22-1/2° Ell

Socket x Socket

816-005C	1/2	20	240	090	18.00
816-007C	3/4	20	240	090	25.91
816-010C	1	20	160	090	41.29
816-010CF	1	1	25	097	95.71
816-012C	1-1/4	20	0	090	81.03
816-015C	1-1/2	20	0	090	83.26
816-015CF	1-1/2	1	25	097	110.07
816-020C	2	20	0	090	93.37
816-025C	2-1/2	5	0	090	234.36
816-025CF	2-1/2	1	18	097	231.16
816-030C	3	5	0	090	245.15





Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Non 90° Ells

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
22-1/2° Ell (continued)					
Socket x Socket					
816-040C	4	4	0	090	336.55
816-050CF	5	1	8	097	429.38
816-060C	6	4	0	090	1036.76
816-060CF	6	1	8	097	646.32
816-080C	8	4	0	090	2156.97
816-080CF	8	1	4	097	1228.14
816-100CF	10	1	2	097	2038.65
816-120CF	12	1	2	097	2685.13
816-140CF	14	1	0	097	5701.34
816-160CF	16	1	0	097	8026.11
816-180CF	18	1	0	097	11635.61
816-200CF	20	1	0	097	10985.45
816-240CF	24	1	0	097	26562.21

45° Ell

Socket x Socket

817-002C	1/4	25	450	090	47.41
817-003C	3/8	50	300	090	47.41
817-005C	1/2	20	120	090	15.27
817-007C	3/4	20	120	090	22.04
817-010C	1	15	120	090	35.07
817-012C	1-1/4	10	80	090	68.93
817-015C	1-1/2	10	0	090	70.77
817-020C	2	10	0	090	79.37
817-025C	2-1/2	5	0	090	162.15
817-030C	3	5	0	090	208.36
817-040C	4	5	0	090	286.04
817-050C	5	4	0	090	837.16
817-050CF	5	1	2	097	369.38
817-060C	6	4	0	090	881.23
817-080C	8	2	0	090	1833.45
817-100C	10	1	0	091	3479.20
817-100CF	10	1	2	097	2101.05
817-120C	12	1	0	091	6121.07
817-120CF	12	1	0	097	2950.02
817-140C	14	1	0	095	6824.87
817-140CF	14	1	0	097	6171.15
817-160CF	16	1	0	097	9007.19
817-180CF	18	1	0	097	13938.81
817-200CF	20	1	0	097	18439.99
817-240CF	24	1	0	097	22239.96

15° Ell

Socket x Socket

818-005CF	1/2	1	25	097	67.14
818-007CF	3/4	1	23	097	69.19
818-010CF	1	1	20	097	95.71

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
15° Ell (continued)					
Socket x Socket					
818-012CF	1-1/4	1	15	097	102.08
818-015CF	1-1/2	1	25	097	110.07
818-020CF	2	1	25	097	206.93
818-025CF	2-1/2	1	18	097	231.16
818-030CF	3	1	35	097	257.85
818-040CF	4	1	18	097	336.74
818-050CF	5	1	4	097	429.38
818-060CF	6	1	8	097	646.32
818-080CF	8	1	3	097	1228.14
818-100CF	10	1	2	097	2038.65
818-120CF	12	1	0	097	2685.13
818-140CF	14	1	0	097	5701.34
818-160CF	16	1	0	097	8026.11
818-180CF	18	1	0	097	11635.61
818-200CF	20	1	0	097	10702.51
818-240CF	24	1	0	097	17923.96

45° Ell

Fipt x Fipt

819-002C	1/4	25	450	090	44.52
819-003C	3/8	25	150	090	44.52
819-005C	1/2	25	150	090	42.18
819-007C	3/4	10	60	090	46.34
819-010C	1	10	60	090	50.99
819-012C	1-1/4	10	80	090	87.13
819-015C	1-1/2	10	0	090	87.13
819-020C	2	10	0	090	114.99
819-025C	2-1/2	5	0	090	218.01
819-030C	3	5	0	090	313.99
819-040C	4	5	0	090	493.93

45° Ell - Special Reinforced

SR Fipt x SR Fipt - Stainless Steel Collar

819-005CSR	1/2	25	150	096	22.31
819-007CSR	3/4	25	300	096	27.26
819-010CSR	1	10	60	096	33.04

60° Ell

Socket x Socket

824-005CF	1/2	1	25	097	192.55
824-007CF	3/4	25	0	097	229.93
824-010CF	1	1	15	097	217.72
824-012CF	1-1/4	1	16	097	222.98
824-015CF	1-1/2	1	15	097	241.45
824-020CF	2	1	16	097	304.09
824-025CF	2-1/2	1	10	097	348.04
824-030CF	3	1	4	097	597.13

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Non 90° Ells

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
60° Ell (continued)					
Socket x Socket					
824-040CF	4	1	4	097	716.80
824-060CF	6	1	2	097	994.75
824-080CF	8	1	2	097	1507.20
824-100CF	10	1	0	097	3034.19
824-120CF	12	1	0	097	4690.01
824-140CF	14	1	0	097	11306.18
824-160CF	16	1	0	097	15873.56
824-180CF	18	1	0	097	22021.69
824-200CF	20	1	0	097	29470.23
824-240CF	24	1	0	097	49108.44

45° Street Ell

Spigot x Socket



827-005C	1/2	50	400	090	15.27
827-007C	3/4	50	0	090	22.04
827-010C	1	50	0	090	35.07
827-012C	1-1/4	25	0	090	68.93
827-015C	1-1/2	25	0	090	70.64
827-020C	2	10	0	090	79.37
827-025C ¹	2-1/2	12	0	090	175.64
827-030C	3	10	0	090	208.36
827-040C	4	5	0	090	286.04
827-050CF	5	1	2	097	547.23
827-060C	6	4	0	090	1036.76
827-080C	8	2	0	090	2156.97
827-100C ¹	10	1	0	091	4093.18
827-120C ¹	12	1	0	091	7201.23
827-140CF	14	1	0	097	8822.49
827-160CF	16	1	0	097	11285.27
827-180CF	18	1	0	097	16466.44
827-200CF	20	1	0	097	27613.57
827-240CF	24	1	0	097	27560.56

¹ = Assembled with Molded Components

22-1/2° Street Ell

Spigot x Socket



842-005C	1/2	50	400	090	20.49
842-007C	3/4	50	0	090	31.98
842-010C	1	50	0	090	49.99
842-012C	1-1/4	20	0	090	62.64
842-015C	1-1/2	25	0	090	90.02
842-020C	2	20	0	090	113.55
842-025C	2-1/2	5	0	090	208.51
842-030C	3	5	0	090	302.77
842-040C	4	4	0	090	388.27
842-060C	6	6	0	090	1280.38
842-080C	8	1	2	090	2684.40

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

22-1/2° Street Ell (continued)

Spigot x Socket

842-100CF	10	1	2	097	2071.29
842-120CF	12	1	2	097	2747.20

Crosses

Cross

Socket x Socket x Socket x Socket



820-002C	1/4	25	150	090	124.82
820-005C	1/2	50	0	090	124.82
820-007C	3/4	50	0	090	131.34
820-010C	1	50	0	090	145.59
820-012C	1-1/4	25	0	090	155.77
820-015C	1-1/2	25	0	090	169.33
820-020C	2	10	0	090	219.59
820-025C	2-1/2	10	0	090	292.77
820-030C	3	5	0	090	372.87
820-040C	4	3	0	090	666.06
820-060CF	6	1	0	097	1750.36
820-080CF	8	1	0	097	3329.39
820-100CF	10	1	0	097	4952.66
820-120CF	12	1	0	097	7036.97
820-140CF	14	1	0	097	10141.87
820-160CF	16	1	0	097	15876.22
820-180CF	18	1	0	097	19685.90

Cross - Reducing

Socket x Socket x Socket x Socket



820-101C ¹	3/4X1/2	50	0	090	162.84
820-130C ¹	1X1/2	25	0	090	193.20
820-131C	1X3/4	20	0	090	193.20
820-166C ¹	1-1/4X1/2	25	0	090	172.81
820-167C	1-1/4X3/4	25	0	090	140.19
820-168C ¹	1-1/4X1	25	0	090	277.43
820-209C ¹	1-1/2X1/2	20	0	090	306.56
820-210C	1-1/2X3/4	15	0	090	306.56
820-211C ¹	1-1/2X1	25	0	090	306.56
820-212C ¹	1-1/2X1-1/4	25	0	090	306.56
820-247C ¹	2X1/2	10	0	090	396.94
820-248C ¹	2X3/4	10	0	090	396.94
820-249C ¹	2X1	10	0	090	396.94
820-250C ¹	2X1-1/4	10	0	090	396.94
820-251C ¹	2X1-1/2	10	0	090	396.94
820-289C	2-1/2X1	15	0	090	269.88
820-290C ¹	2-1/2X1-1/4	10	0	090	509.16
820-291C ¹	2-1/2X1-1/2	8	0	090	509.16
820-292C ¹	2-1/2X2	10	0	090	509.16
820-335C ¹	3X1	4	0	090	701.08
820-336C ¹	3X1-1/4	4	0	090	701.08
820-337C ¹	3X1-1/2	4	0	090	701.08



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Crosses

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Cross - Reducing (continued)

Socket x Socket x Socket x Socket

820-338C ¹	3X2	4	0	090	701.08
820-339C ¹	3X2-1/2	4	0	090	701.08
820-420C ¹	4X2	3	0	090	1034.08
820-422C ¹	4X3	3	0	090	1034.08
820-420CF	4X2	1	3	097	1016.14
820-528CF	6X2	1	3	097	1594.07
820-530CF	6X3	1	2	097	1800.87
820-532CF	6X4	1	2	097	1844.45
820-578CF	8X2	1	2	097	2077.23
820-580CF	8X3	1	0	097	2180.20
820-582CF	8X4	1	0	097	2041.64
820-585CF	8X6	1	0	097	2682.53
820-621CF	10X2	1	0	097	2490.77
820-623CF	10X3	1	0	097	2678.00
820-624CF	10X4	1	0	097	2799.62
820-626CF	10X6	1	0	097	3344.54
820-628CF	10X8	1	0	097	3872.11
820-661CF	12X2	1	0	097	3041.25
820-663CF	12X3	1	0	097	3342.12
820-664CF	12X4	1	0	097	3528.69
820-666CF	12X6	1	0	097	4098.17
820-668CF	12X8	1	0	097	4780.41
820-670CF	12X10	1	0	097	5689.12
820-691CF	14X2	1	0	097	5856.65
820-693CF	14X3	1	0	097	6185.57
820-694CF	14X4	1	0	097	6460.31
820-696CF	14X6	1	0	097	8886.83
820-698CF	14X8	1	0	097	10104.86
820-700CF	14X10	1	0	097	11251.79
820-702CF	14X12	1	0	097	12827.33
820-751CF	16X2	1	0	097	8318.00
820-753CF	16X3	1	0	097	8667.60
820-754CF	16X4	1	0	097	9006.36
820-756CF	16X6	1	0	097	11958.46
820-758CF	16X8	1	0	097	13217.97
820-762CF	16X12	1	0	097	15493.72
820-764CF	16X14	1	0	097	20316.03
820-781CF	18X2	1	0	097	11141.51
820-783CF	18X3	1	0	097	11565.86
820-784CF	18X4	1	0	097	13444.13
820-786CF	18X6	1	0	097	15391.56
820-788CF	18X8	1	0	097	16806.35
820-790CF	18X10	1	0	097	18430.40
820-792CF	18X12	1	0	097	20012.09
820-794CF	18X14	1	0	097	24863.36
820-796CF	18X16	1	0	097	27877.03

¹ Sized with Bushing

Couplings

Part Number	Size	Gasket to Gasket - L1	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	-----------------------	--------	----------	-----------	------

Repair Coupling - Fabricated



Gasket x Gasket

828-020CF	2	6	1	15	097	267.44
828-030CF	3	11- 3/4	1	5	097	340.66
828-040CF	4	15	1	4	097	424.45
828-060CF	6	18-1/4	1	2	097	491.86
828-080CF	8	19	1	2	097	1322.42
828-100CF	10	21-1/4	1	0	097	1426.66
828-120CF	12	21-3/8	1	0	097	1877.17
828-140CF	14	21	1	0	097	5525.29
828-160CF	16	22-1/4	1	0	097	7822.95
828-180CF	18	22-5/8	1	0	097	12655.02
828-200CF	20	23-1/2	1	0	097	18627.65
828-240CF	24	23-1/2	1	0	097	26994.69

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Coupling



Socket x Socket

829-002C	1/4	25	450	090	33.94
829-003C	3/8	25	150	090	33.94
829-005C	1/2	25	150	090	13.17
829-007C	3/4	15	90	090	18.45
829-010C	1	15	90	090	24.85
829-012C	1-1/4	10	60	090	37.19
829-015C	1-1/2	10	40	090	46.80
829-020C	2	20	0	090	54.44
829-025C	2-1/2	10	0	090	121.09
829-030C	3	5	0	090	131.60
829-040C	4	5	0	090	172.44
829-050C	5	6	0	090	385.86
829-050CF	5	1	10	097	206.00
829-060C	6	4	0	090	406.15
829-080C	8	4	0	090	1097.67
829-100C	10	1	0	091	1380.75
829-100CF	10	1	0	097	759.91
829-120C	12	1	0	091	1617.18
829-120CF	12	1	0	097	1027.77
829-140C	14	1	0	095	2057.76
829-140CF	14	1	0	097	1712.21
829-160CF	16	1	0	097	2626.65
829-180CF	18	1	0	097	2988.27
829-200CF	20	1	0	097	4254.06
829-240CF	24	1	0	097	5168.73

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Couplings

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Coupling - Reducer

Socket x Socket



829-101C	3/4X1/2	50	400	090	34.48
829-130C	1X1/2	25	200	090	49.23
829-131C	1X3/4	25	200	090	49.23
829-166C	1-1/4X1/2	25	0	090	112.74
829-167C	1-1/4X3/4	25	0	090	112.74
829-168C	1-1/4X1	25	0	090	112.74
829-209C	1-1/2X1/2	25	0	090	111.81
829-210C	1-1/2X3/4	25	0	090	111.81
829-211C	1-1/2X1	25	0	090	111.81
829-212C	1-1/2X1-1/4	25	0	090	111.81
829-247C	2X1/2	25	0	090	147.86
829-248C	2X3/4	10	80	090	147.86
829-249C	2X1	25	0	090	147.86
829-250C	2X1-1/4	10	0	090	147.86
829-251C	2X1-1/2	10	40	090	147.86
829-290C ¹	2-1/2X1-1/4	10	0	090	238.74
829-291C	2-1/2X1-1/2	10	0	090	168.39
829-292C	2-1/2X2	10	0	090	168.39
829-335C ¹	3X1	8	0	090	416.44
829-336C ¹	3X1-1/4	6	0	090	429.17
829-337C	3X1-1/2	8	0	090	429.17
829-338C	3X2	10	0	090	340.21
829-339C	3X2-1/2	10	0	090	341.66
829-339CF	3X2-1/2	1	9	097	324.59
829-416C ¹	4X3/4	4	0	090	490.62
829-417C ¹	4X1	4	0	090	490.62
829-419C ¹	4X1-1/2	4	0	090	490.62
829-420C	4X2	6	0	090	405.83
829-421C	4X2-1/2	4	0	090	405.83
829-422C	4X3	4	0	090	405.83
829-488CF ¹	5X3	1	6	097	400.42
829-490CF ¹	5X4	1	6	097	252.59
829-528C ¹	6X2	6	0	090	1073.67
829-529C ¹	6X2-1/2	4	0	090	1265.34
829-530C ¹	6X3	10	0	090	1095.62
829-532C	6X4	4	0	090	921.89
829-533CF	6X5	1	5	097	576.45
829-579CF ^{1,2}	8X2-1/2	1	4	097	2386.64
829-580CF ^{1,2}	8X3	1	6	097	976.39
829-582C ¹	8X4	2	0	090	1672.87
829-582CF ^{1,2}	8X4	1	4	097	865.58
829-583CF ²	8X5	1	4	097	1014.06
829-585C	8X6	2	0	090	1597.35
829-621CF ^{1,3}	10X2	1	2	097	1808.73
829-623CF ^{1,3}	10X3	1	2	097	1516.93
829-624CF ³	10X4	1	2	097	1458.04
829-625CF ³	10X5	1	2	097	1571.54
829-626C	10X6	1	0	091	2484.08

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Coupling - Reducer (continued)

Socket x Socket

829-626CF ²	10X6	1	2	097	1122.65
829-628C	10X8	1	0	091	2484.08
829-628CF	10X8	1	4	097	1471.07
829-663CF ^{1,4}	12X3	1	2	097	3296.15
829-664CF ⁴	12X4	1	2	097	3245.29
829-665CF ⁴	12X5	1	0	097	3243.02
829-666CF ³	12X6	1	0	097	3018.25
829-668C	12X8	1	0	091	2706.52
829-668CF ²	12X8	1	0	097	2309.68
829-670CF	12X10	1	2	097	1231.67
829-694CF ⁴	14X4	1	0	097	4711.48
829-696CF ³	14X6	1	0	097	4449.59
829-698CF ²	14X8	1	0	097	3704.43
829-700CF	14X10	1	0	097	3170.65
829-702CF	14X12	1	0	097	2773.65
829-754CF ⁵	16X4	1	0	097	5804.22
829-756CF ⁴	16X6	1	0	097	5973.56
829-758CF ³	16X8	1	0	097	6827.80
829-760CF ²	16X10	1	0	097	6540.02
829-762CF	16X12	1	0	097	6198.33
829-764CF	16X14	1	0	097	5506.95
829-783CF ^{1,6}	18X3	1	0	097	11960.55
829-784CF ⁶	18X4	1	0	097	11866.57
829-786CF ⁵	18X6	1	0	097	11778.00
829-788CF ⁴	18X8	1	0	097	11521.82
829-790CF ³	18X10	1	0	097	11452.55
829-792CF ²	18X12	1	0	097	11256.59
829-794CF ²	18X14	1	0	097	11079.89
829-796CF	18X16	1	0	097	8088.12
829-814CF ⁷	20X4	1	0	097	11728.03
829-816CF ⁶	20X6	1	0	097	11609.86
829-818CF ⁵	20X8	1	0	097	11429.33
829-820CF ⁴	20X10	1	0	097	11174.84
829-822CF ³	20X12	1	0	097	16079.29
829-824CF ³	20X14	1	0	097	15851.31
829-826CF ²	20X16	1	0	097	13065.45
829-828CF	20X18	1	0	097	12107.26
829-904CF ⁸	24X4	1	0	097	19236.03
829-906CF ⁷	24X6	1	0	097	19126.71
829-908CF ⁶	24X8	1	0	097	18928.87
829-910CF ⁵	24X10	1	0	097	33378.59
829-912CF ⁴	24X12	1	0	097	17966.80
829-914CF ⁴	24X14	1	0	097	27137.20
829-916CF ³	24X16	1	0	097	25169.79
829-918CF ²	24X18	1	0	097	26844.45
829-920CF	24X20	1	0	097	24159.77

¹ Outlet Sized with Bushing



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings


Couplings

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Coupling - Reducer (continued)

Socket x Socket

¹ Outlet Sized with Bushing

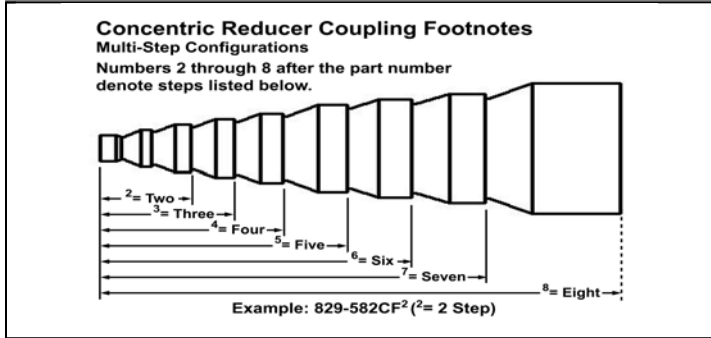

Coupling - Eccentric Reducer



Socket x Socket


829-101CFE	3/4X1/2	25	0	097	76.55
829-130CFE	1X1/2	16	0	097	83.01
829-131CFE	1X3/4	15	0	097	85.27
829-168CFE	1-1/4X1	1	12	097	86.82
829-209CFE ²	1-1/2X1/2	1	10	097	137.48
829-210CFE ²	1-1/2X3/4	1	25	097	164.98
829-211CFE	1-1/2X1	1	25	097	97.28
829-212CFE	1-1/2X1-1/4	1	20	097	90.94
829-249CFE	2X1	1	25	097	124.38
829-250CFE	2X1-1/4	1	25	097	113.18
829-251CFE	2X1-1/2	1	10	097	110.54
829-289CFE ²	2-1/2X1	1	12	097	231.87
829-290CFE ²	2-1/2X1-1/4	1	20	097	188.73
829-291CFE ²	2-1/2X1-1/2	1	20	097	188.34
829-292CFE	2-1/2X2	1	10	097	133.73
829-335CFE ²	3X1	1	20	097	294.07
829-336CFE ²	3X1-1/4	1	10	097	280.83
829-337CFE ²	3X1-1/2	1	10	097	276.20
829-338EC	3X2	15	0	090	340.21
829-338CFE	3X2	1	20	097	179.08
829-339CFE	3X2-1/2	1	10	097	359.59
829-417CFE ³	4X1	1	18	097	453.76
829-418CFE ³	4X1-1/4	1	6	097	462.04
829-419CFE ³	4X1-1/2	1	12	097	437.27
829-420CFE ²	4X2	1	10	097	400.18
829-421CFE ²	4X2-1/2	1	6	097	369.38
829-422CFE	4X3	1	10	097	371.60
829-490CFE	5X4	1	8	097	306.94
829-528CFE ³	6X2	1	6	097	808.73
829-529CFE ³	6X2-1/2	1	6	097	753.37
829-530CFE ²	6X3	1	6	097	645.93
829-532CFE	6X4	1	10	097	549.83

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Coupling - Eccentric Reducer (continued)

Socket x Socket

829-533CFE	6X5	1	5	097	622.97
829-578CFE ⁴	8X2	1	4	097	2390.97
829-580CFE ³	8X3	1	2	097	1450.20
829-582CFE ²	8X4	1	2	097	1379.80
829-583CFE ²	8X5	1	2	097	1229.69
829-585CFE	8X6	1	4	097	1196.63
829-624CFE ³	10X4	1	0	097	2864.15
829-625CFE ³	10X5	1	0	097	2536.14
829-626CFE ²	10X6	1	2	097	2455.62
829-628CFE	10X8	1	2	097	1764.22
829-664CFE ⁴	12X4	1	0	097	5159.14
829-666CFE ³	12X6	1	0	097	3371.20
829-668CFE ²	12X8	1	0	097	3215.23
829-670CFE	12X10	1	0	097	2877.33
829-696CFE ³	14X6	1	0	097	5581.02
829-698CFE ²	14X8	1	0	097	5472.06
829-700CFE	14X10	1	0	097	3900.60
829-702CFE	14X12	1	0	097	3561.17
829-756CFE ⁴	16X6	1	0	097	10193.91
829-758CFE ³	16X8	1	0	097	9856.19
829-760CFE ²	16X10	1	0	097	9675.29
829-762CFE ²	16X12	1	0	097	9294.95
829-764CFE	16X14	1	0	097	8551.52
829-786CFE ⁵	18X6	1	0	097	19656.55
829-788CFE ⁴	18X8	1	0	097	19383.77
829-790CFE ³	18X10	1	0	097	18632.94
829-792CFE ³	18X12	1	0	097	17228.81
829-794CFE ²	18X14	1	0	097	16002.80
829-796CFE	18X16	1	0	097	12266.88

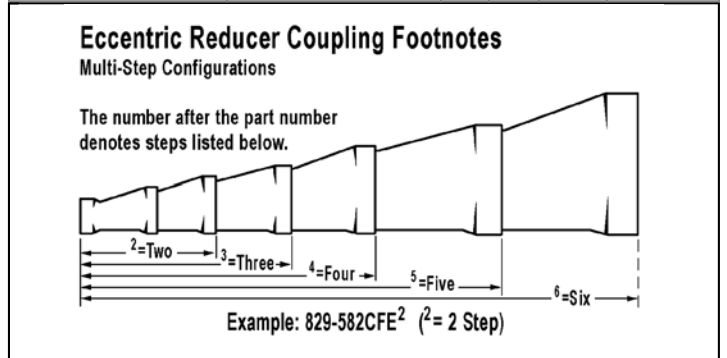

Coupling

Fipt x Fipt



830-002C	1/4	25	450	090	42.63
830-003C	3/8	25	150	090	42.63
830-005C	1/2	25	150	090	35.07
830-007C	3/4	25	150	090	56.65

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Couplings

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
Coupling (continued)					
Fipt x Fipt					
830-012C	1-1/4	10	60	090	68.23
830-015C	1-1/2	10	80	090	73.33
830-020C	2	10	0	090	86.44
830-025C	2-1/2	5	0	090	155.09
830-030C	3	5	0	090	201.61
830-040C	4	5	0	090	368.02
830-060CF	6	1	8	097	501.59
830-080CF	8	1	6	097	764.84

Coupling - Special Reinforced

SR Fipt x SR Fipt - Stainless Steel Collar

830-005CSR	1/2	25	150	096	19.24
830-007CSR	3/4	25	150	096	31.07
830-010CSR	1	25	200	096	35.33
830-012CSR	1-1/4	10	120	096	37.52
830-015CSR	1-1/2	10	80	096	40.22
830-020CSR	2	10	0	096	47.55
830-030CSR	3	10	0	096	189.85

Coupling - Reducer

Fipt x Fipt

830-072C	1/2X1/4	50	400	090	47.28
830-073C	1/2X3/8	25	150	090	47.28
830-101C	3/4X1/2	50	200	090	57.48

Coupling - Special Reinforced Reducer

SR Fipt x SR Fipt - Stainless Steel Collar

830-101CSR	3/4X1/2	50	200	096	34.46
830-130CSR	1X1/2	50	0	096	41.64
830-131CSR	1X3/4	25	200	096	41.64
830-168CSR	1-1/4X1	25	0	096	56.63
830-210CSR	1-1/2X3/4	25	0	096	80.97
830-211CSR	1-1/2X1	10	80	096	80.97
830-212CSR	1-1/2X1-1/4	10	80	096	80.97
830-249CSR	2X1	25	0	096	199.35
830-251CSR	2X1-1/2	15	0	096	199.35

Grooved Coupling Adapter

Groove x Socket

833-012C	1-1/4	10	60	090	59.35
833-015C	1-1/2	10	80	090	78.27
833-020C	2	5	40	090	101.75

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Grooved Coupling Adapter (continued)

Groove x Socket

833-025C	2-1/2	5	0	090	167.31
833-030C	3	5	0	090	206.31
833-040C	4	5	0	090	351.05
833-050CF	5	1	7	097	388.46
833-060C	6	5	0	090	502.18
833-080CF	8	1	4	097	633.35
833-100CF	10	1	0	097	994.00
833-120CF	12	1	0	097	1401.89

Adapters

Female Adapter

Socket x Fipt

835-002C	1/4	25	450	090	43.06
835-003C	3/8	25	150	090	43.06
835-098C	3/4X1/4	25	150	090	28.49
835-005C	1/2	25	150	090	21.33
835-007C	3/4	15	90	090	28.52
835-010C	1	15	90	090	52.02
835-012C	1-1/4	10	120	090	53.29
835-015C	1-1/2	10	80	090	62.06
835-020C	2	10	0	090	106.98
835-025C	2-1/2	5	0	090	205.19
835-030C	3	5	0	090	421.03
835-040C	4	5	0	090	700.80
835-060C	6	6	0	090	994.93
835-060CF	6	1	8	097	630.23
835-080C	8	3	0	090	1572.01
835-080CF	8	1	6	097	792.75
835-100CF	10	1	2	097	1151.98
835-120CF	12	1	0	097	1492.78

Female Adapter - Brass Transition

Socket x Fipt With Brass Thread Insert

835-005CBR	1/2	25	150	096	65.41
835-007CBR	3/4	15	90	096	135.40
835-010CBR	1	15	90	096	237.62
835-012CBR	1-1/4	15	60	096	387.64
835-015CBR	1-1/2	10	40	096	511.06
835-020CBR	2	8	32	096	638.33

Not intended to convey or dispense water for human consumption through drinking or cooking

Female Adapter - Brass Transition Reducing

Socket x Fipt With Brass Thread Insert

835-101CBR	3/4X1/2	50	0	096	94.72
------------	---------	----	---	-----	-------



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Adapters

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Female Adapter - Brass Transition Reducing (continued)

Socket x Fipt With Brass Thread Insert

Not intended to convey or dispense water for human consumption through drinking or cooking



Female Adapter - Special Reinforced

Socket x SR Fipt - Stainless Steel Collar

835-002CSR	1/4	25	450	096	35.45
835-003CSR	3/8	25	300	096	26.98
835-005CSR	1/2	25	150	096	11.60
835-007CSR	3/4	25	150	096	12.54
835-010CSR	1	25	200	096	28.59
835-012CSR	1-1/4	10	60	096	29.35
835-015CSR	1-1/2	10	80	096	34.02
835-020CSR	2	10	0	096	48.38
835-025CSR	2-1/2	5	0	096	112.44
835-030CSR	3	15	0	096	231.06
835-040CSR	4	5	0	096	384.57
835-060CSR	6	6	0	096	600.76



Female Adapter - Special Reinforced Reducing

Socket x SR Fipt - Stainless Steel Collar

835-074CSR	1/2X3/4	50	400	096	12.54
835-098CSR	3/4X1/4	25	150	096	36.49
835-101CSR	3/4X1/2	50	400	096	12.54
835-102CSR	3/4X1	50	0	096	28.59
835-130CSR	1X1/2	50	0	096	28.59
835-131CSR	1X3/4	25	200	096	28.59



Female Adapter - Stainless Steel Transition

Socket x Fipt With Type 316 Stainless Steel Thread Insert

NSF® Certified Lead Free

835-005CSS	1/2	25	150	096	128.44
835-007CSS	3/4	15	90	096	179.38
835-010CSS	1	15	90	096	313.91
835-012CSS	1-1/4	25	0	096	510.15
835-015CSS	1-1/2	10	40	096	665.52
835-020CSS	2	8	32	096	778.86



Female Adapter - Encapsulated Special Reinforced

Socket x ESR Fipt

835-002CESR	1/4	25	450	096	34.28
835-003CESR	3/8	25	300	096	34.28
835-005CESR	1/2	25	150	096	17.80
835-007CESR	3/4	25	300	096	18.78

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Female Adapter - Encapsulated Special Reinforced (continued)

Socket x ESR Fipt

835-010CESR	1	25	200	096	41.37
835-012CESR	1-1/4	10	80	096	42.33
835-015CESR	1-1/2	10	80	096	54.83
835-020CESR	2	10	0	096	85.20



Male Adapter

Mipt x Socket

836-005C	1/2	25	150	090	17.04
836-007C	3/4	25	150	090	20.80
836-102C	3/4X1	25	0	090	76.53
836-131C	1X3/4	50	400	090	72.67
836-010C	1	20	240	090	35.02
836-012C	1-1/4	10	60	090	51.61
836-015C	1-1/2	10	120	090	69.78
836-020C	2	10	80	090	94.65
836-025C	2-1/2	10	0	090	258.03
836-030C	3	5	0	090	346.80
836-040C	4	5	0	090	586.20
836-050CF	5	1	8	097	639.22
836-060C	6	5	0	090	840.19
836-060CF	6	1	4	097	595.49
836-080CF	8	1	2	097	760.24
836-100CF	10	1	2	097	1408.65
836-120CF	12	1	0	097	1559.36



Male Adapter - Internal Reinforced

R Mipt x Socket - Stainless Steel Sleeve

NSF® Certified Lead Free

836-005CR	1/2	25	150	096	17.82
836-007CR	3/4	25	300	096	20.42
836-010CR	1	10	120	096	24.23
836-012CR	1-1/4	10	60	096	49.58
836-015CR	1-1/2	10	40	096	66.88
836-020CR	2	10	0	096	90.51



Male Adapter - CPVC Lined Brass Transition

Brass Mipt x Socket

NSF® Certified Lead Free

836-005CBR	1/2	40	160	096	145.03
836-007CBR	3/4	40	160	096	204.20
836-010CBR	1	10	60	096	355.62
836-012CBR	1-1/4	10	40	096	578.44
836-015CBR	1-1/2	10	40	096	752.03
836-020CBR	2	8	32	096	881.23

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Adapters

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Male Spigot Adapter

Spigot x Mipt

861-005C	1/2	50	300	090	20.78
861-007C	3/4	25	150	090	25.81
861-010C	1	50	0	090	43.75
861-131C	1X3/4	50	200	090	51.13
861-012C	1-1/4	25	200	090	49.61
861-015C	1-1/2	25	0	090	54.76
861-020C	2	25	0	090	64.11



Female Spigot Adapter - Brass Transition

Spigot x Fipt With Brass Thread Insert

878-010CBR	1	15	90	096	158.04
------------	---	----	----	-----	--------

Not intended to convey or dispense water for human consumption through drinking or cooking



Female Spigot Adapter - Special Reinforced

Spigot x SR Fipt - Stainless Steel Collar

878-005CSR	1/2	50	600	096	12.36
878-007CSR	3/4	25	300	096	13.05
878-010CSR	1	50	0	096	29.38
878-012CSR	1-1/4	25	0	096	30.36
878-015CSR	1-1/2	25	0	096	35.24
878-020CSR	2	15	0	096	64.18
878-030CSR	3	5	0	096	233.97
878-040CSR	4	5	0	096	392.75



Female Spigot Adapter - Special Reinforced Reducing

Spigot x SR Fipt - Stainless Steel Collar

878-072CSR	1/2X1/4	25	450	096	35.45
878-098CSR	3/4X1/4	50	300	096	41.25
878-128CSR	1X1/4	50	400	096	46.18



Female Spigot Adapter - Encapsulated Special Reinforced

Spigot x ESR Fipt

878-005CESR	1/2	50	600	096	18.31
878-007CESR	3/4	25	300	096	19.47
878-010CESR	1	50	0	096	41.77
878-012CESR	1-1/4	25	0	096	42.88
878-015CESR	1-1/2	25	0	096	55.93
878-020CESR	2	15	0	096	86.45



Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Female Spigot Adapter - Stainless Steel Transition

Spigot x Fipt With Type 316 Stainless Steel Thread Insert



878-005CSS	1/2	25	150	096	127.27
878-007CSS	3/4	25	150	096	163.72
878-010CSS	1	15	90	096	212.45

Reducer Bushing

Reducer Bushing Flush Style

Spigot x Socket



837-052C	3/8X1/4	50	450	090	27.59
837-072C	1/2X1/4	50	300	090	27.59
837-073C	1/2X3/8	50	300	090	27.59
837-101C	3/4X1/2	50	300	090	14.07
837-129C ¹	1X3/8	50	200	090	47.92
837-130C	1X1/2	50	400	090	21.88
837-131C	1X3/4	50	300	090	21.88
837-166C	1-1/4X1/2	25	300	090	58.01
837-167C	1-1/4X3/4	25	150	090	58.01
837-168C	1-1/4X1	25	150	090	58.01
837-209C	1-1/2X1/2	25	200	090	65.62
837-210C	1-1/2X3/4	25	200	090	65.62
837-211C	1-1/2X1	25	200	090	65.62
837-212C	1-1/2X1-1/4	25	200	090	65.62
837-247C	2X1/2	10	120	090	84.69
837-248C	2X3/4	10	60	090	84.69
837-249C	2X1	10	120	090	84.69
837-250C	2X1-1/4	10	60	090	84.69
837-251C	2X1-1/2	10	60	090	84.69
837-289C	2-1/2X1	10	80	090	145.60
837-290C	2-1/2X1-1/4	10	80	090	103.09
837-291C	2-1/2X1-1/2	10	40	090	103.09
837-292C	2-1/2X2	15	0	090	103.09
837-333C	3X1/2	10	0	090	182.61
837-334C ¹	3X3/4	10	0	090	179.60
837-335C	3X1	10	0	090	157.09
837-336C	3X1-1/4	10	0	090	157.09
837-337C	3X1-1/2	10	0	090	157.09
837-338C	3X2	10	0	090	157.09
837-339C	3X2-1/2	15	0	090	157.09
837-416C ¹	4X3/4	10	0	090	263.64
837-418C ¹	4X1-1/4	6	0	090	282.46
837-419C	4X1-1/2	6	0	090	263.66
837-420C	4X2	6	0	090	173.71
837-421C	4X2-1/2	6	0	090	173.71
837-422C	4X3	6	0	090	173.71
837-486C ¹	5X2	6	0	090	512.31
837-488C ¹	5X3	5	0	090	512.31
837-490C	5X4	4	0	090	328.35
837-490CF	5X4	1	4	097	230.07



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Reducer Bushing

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Reducer Bushing Flush Style (continued)

Spigot x Socket

837-525C ¹	6X1	5	0	090	466.73
837-527C ¹	6X1-1/2	5	0	090	482.97
837-528C	6X2	5	0	090	372.66
837-529C ¹	6X2-1/2	5	0	090	540.57
837-530C	6X3	5	0	090	372.66
837-532C	6X4	5	0	090	370.07
837-533CF	6X5	5	0	097	696.45
837-534C	6X5	5	0	090	430.65
837-578C ¹	8X2	4	0	090	1606.64
837-580C ¹	8X3	4	0	090	1606.64
837-582C	8X4	4	0	090	1606.64
837-583CF	8X5	4	0	097	1946.48
837-585C	8X6	4	0	090	1218.27
837-621C ¹	10X2	2	0	091	2676.51
837-622C ¹	10X2-1/2	2	0	091	2740.80
837-623C ¹	10X3	2	0	091	2676.51
837-624C ¹	10X4	4	0	091	2676.51
837-626C	10X6	3	0	091	2156.21
837-628C	10X8	3	0	091	2156.21
837-628CF	10X8	1	6	097	1865.98
837-663CF	12X3	1	2	097	3022.59
837-664C ¹	12X4	2	0	091	4394.69
837-666CF	12X6	1	2	097	2584.97
837-668C	12X8	2	0	091	2718.49
837-670CF	12X10	1	3	097	1946.48
837-696CF	14X6	1	0	097	6823.46
837-698CF	14X8	1	3	097	4757.05
837-700CF	14X10	3	0	097	3862.52
837-702CF	14X12	3	0	097	2799.05
837-754CF	16X4	1	0	097	10920.39
837-756CF	16X6	1	0	097	10757.41
837-758CF	16X8	1	0	097	10055.19
837-760CF	16X10	1	0	097	8039.23
837-762CF	16X12	2	0	097	4089.83
837-764CF	16X14	1	2	097	3894.59
837-786CF	18X6	1	0	097	10687.22
837-788CF	18X8	1	0	097	9915.70
837-790CF	18X10	1	0	097	9721.56
837-792CF	18X12	1	0	097	8397.15
837-794CF	18X14	1	0	097	7168.82
837-796CF	18X16	1	0	097	4347.92
837-816CF	20X6	1	0	097	21982.51
837-818CF	20X8	1	0	097	14349.44
837-820CF	20X10	1	0	097	18022.54
837-822CF	20X12	1	0	097	17253.81
837-824CF	20X14	1	0	097	14993.59
837-826CF	20X16	1	0	097	10612.53
837-828CF	20X18	1	0	097	7048.95

¹ Sized with Bushing

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------



Reducer Bushing Flush Style

Spigot x Fipt

838-052C	3/8X1/4	50	450	090	29.66
838-071C	1/2X1/8	50	300	090	29.66
838-072C	1/2X1/4	50	600	090	29.66
838-073C	1/2X3/8	50	300	090	29.66
838-098C	3/4X1/4	50	300	090	33.06
838-099C	3/4X3/8	50	600	090	33.06
838-101C	3/4X1/2	50	600	090	15.35
838-129C	1X3/8	50	400	090	43.91
838-130C	1X1/2	50	400	090	19.46
838-131C	1X3/4	50	400	090	19.46
838-166C	1-1/4X1/2	25	150	090	62.83
838-167C	1-1/4X3/4	25	300	090	62.83
838-168C	1-1/4X1	25	300	090	62.83
838-207C	1-1/2X1/4	25	200	090	77.40
838-209C	1-1/2X1/2	25	200	090	77.40
838-210C	1-1/2X3/4	25	200	090	77.40
838-211C	1-1/2X1	25	200	090	77.40
838-212C	1-1/2X1-1/4	25	200	090	77.40
838-247C	2X1/2	10	120	090	106.41
838-248C	2X3/4	10	60	090	106.41
838-249C	2X1	10	120	090	106.41
838-250C	2X1-1/4	10	120	090	106.41
838-251C	2X1-1/2	10	120	090	106.41
838-287C	2-1/2X1/2	10	0	090	170.22
838-288C	2-1/2X3/4	10	40	090	170.22
838-289C	2-1/2X1	10	40	090	170.22
838-290C	2-1/2X1-1/4	10	0	090	170.22
838-291C	2-1/2X1-1/2	10	40	090	169.06
838-292C	2-1/2X2	10	40	090	169.06
838-334C	3X3/4	10	0	090	450.44
838-335C	3X1	10	0	090	450.44
838-336C	3X1-1/4	10	0	090	394.01
838-337C	3X1-1/2	10	0	090	394.01
838-338C	3X2	10	0	090	376.87
838-339C	3X2-1/2	10	0	090	379.93
838-420C	4X2	6	0	090	767.97
838-421C	4X2-1/2	6	0	090	767.97
838-422C	4X3	6	0	090	767.97
838-528C	6X2	5	0	090	1548.32
838-530C	6X3	5	0	090	1548.32
838-532C	6X4	5	0	090	1548.32



Reducer Bushing - Special Reinforced

Spigot x SR Fipt - Stainless Steel Collar

838-128CSR	1X1/4	25	150	096	26.35
838-207CSR	1-1/2X1/4	25	200	096	44.55
838-209CSR	1-1/2X1/2	10	120	096	46.42
838-210CSR	1-1/2X3/4	10	120	096	46.42

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Reducer Bushing

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
Reducer Bushing - Special Reinforced (continued)					
Spigot x SR Fipt - Stainless Steel Collar					
838-247CSR	2X1/2	10	80	096	63.79
838-248CSR	2X3/4	10	80	096	63.79
838-249CSR	2X1	10	120	096	63.79
838-334CSR	3X3/4	10	0	096	270.20
838-335CSR	3X1	10	0	096	270.20
838-336CSR	3X1-1/4	10	0	096	270.20
838-337CSR	3X1-1/2	10	0	096	270.20
838-528CSR	6X2	5	0	096	928.95
838-530CSR	6X3	5	0	096	928.95
838-532CSR	6X4	5	0	096	984.32

Reducer Bushing (T.T.) Flush Style

Mipt x Fipt

839-041C	1/4X1/8	25	500	090	39.79
839-052C	3/8X1/4	50	450	090	39.79
839-072C	1/2X1/4	50	300	090	39.79
839-073C	1/2X3/8	50	300	090	39.79
839-098C	3/4X1/4	50	300	090	43.88
839-099C	3/4X3/8	50	300	090	43.88
839-101C	3/4X1/2	50	300	090	18.87
839-128C	1X1/4	25	150	090	47.41
839-129C	1X3/8	50	300	090	47.41
839-130C	1X1/2	50	300	090	31.79
839-131C	1X3/4	50	700	090	31.79
839-166C	1-1/4X1/2	25	150	090	63.17
839-167C	1-1/4X3/4	25	150	090	63.17
839-168C	1-1/4X1	25	300	090	62.67
839-209C	1-1/2X1/2	25	300	090	76.08
839-210C	1-1/2X3/4	25	300	090	76.08
839-211C	1-1/2X1	25	300	090	76.08
839-212C	1-1/2X1-1/4	25	300	090	75.48
839-247C	2X1/2	10	60	090	84.13
839-248C	2X3/4	10	60	090	84.13
839-249C	2X1	10	60	090	84.13
839-250C	2X1-1/4	10	60	090	84.13
839-251C	2X1-1/2	10	60	090	75.48
839-292C	2-1/2X2	10	40	090	202.24
839-337C	3X1-1/2	10	0	090	272.09
839-338C	3X2	10	0	090	272.09
839-339C	3X2-1/2	10	0	090	272.09
839-420C	4X2	6	0	090	467.57
839-422C	4X3	6	0	090	467.57
839-530C	6X3	5	0	090	1687.92
839-532C	6X4	5	0	090	1687.92



Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Reducer Bushing - Special Reinforced Reducing Flush Style

Mipt x SR Fipt - Stainless Steel Collar

839-209CSR	1-1/2X1/2	25	300	096	45.69
839-210CSR	1-1/2X3/4	25	300	096	45.69
839-247CSR	2X1/2	10	60	096	50.51
839-248CSR	2X3/4	10	60	096	50.51
839-249CSR	2X1	10	120	096	50.51
839-420CSR	4X2	6	0	096	280.53



Caps

Cap

Socket

847-002C	1/4	25	450	090	22.71
847-003C	3/8	25	450	090	22.71
847-005C	1/2	50	300	090	20.55
847-007C	3/4	25	300	090	29.28
847-010C	1	15	90	090	51.80
847-012C	1-1/4	10	60	090	56.65
847-015C	1-1/2	10	60	090	56.65
847-020C	2	10	80	090	59.79
847-025C	2-1/2	5	40	090	201.22
847-030C	3	5	0	090	220.55
847-040C	4	5	0	090	224.22
847-050CF	5	1	6	097	422.82
847-060C	6	4	0	090	741.86
847-080C	8	3	0	090	2251.37
847-100CF	10	1	5	097	1880.91
847-120CF	12	1	4	097	2061.41
847-140CF	14	1	2	097	6323.14
847-160CF	16	1	2	097	9299.71
847-180CF	18	1	0	097	11465.86
847-200CF	20	1	0	097	15434.44
847-240CF	24	1	0	097	29456.04



Cap

Fipt

848-002C	1/4	25	450	090	26.57
848-003C	3/8	25	450	090	26.57
848-005C	1/2	25	150	090	22.82
848-007C	3/4	25	300	090	37.77
848-010C	1	15	90	090	52.91
848-012C	1-1/4	10	60	090	94.33
848-015C	1-1/2	10	120	090	96.65
848-020C	2	10	80	090	139.22
848-025C	2-1/2	5	40	090	322.14
848-030C	3	5	0	090	422.61
848-040C	4	5	0	090	613.87





Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Caps

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Cap (continued)

Fipt

848-060CF	6	1	4	097	868.53
848-080CF	8	1	3	097	942.41
848-100CF	10	1	2	097	1927.86
848-120CF	12	1	2	097	3351.82

Cap - Special Reinforced

SR Fipt - Stainless Steel Collar



848-002CSR	1/4	25	500	096	14.60
848-003CSR	3/8	25	450	096	14.60
848-005CSR	1/2	50	300	096	13.05
848-007CSR	3/4	25	300	096	22.75
848-030CSR	3	5	0	096	253.88

Plugs

Plug

Spigot



849-005C	1/2	50	300	090	26.18
849-007C	3/4	50	300	090	32.27
849-010C	1	50	200	090	36.43
849-012C	1-1/4	25	100	090	46.42
849-015C	1-1/2	10	120	090	50.97
849-020C	2	10	120	090	68.28
849-025CF ⁴	2-1/2	4	0	097	80.96
849-030CF ⁴	3	4	0	097	186.18
849-040CF ⁴	4	4	0	097	229.76
849-060CF ⁴	6	1	6	097	285.22
849-080CF ⁴	8	1	6	097	2050.18
849-100CF ⁴	10	1	2	097	2057.88
849-120CF ⁴	12	1	0	097	2217.68
849-140CF ⁴	14	1	0	097	6636.82
849-160CF ⁴	16	1	0	097	9559.34
849-180CF ⁴	18	1	0	097	11371.60
849-200CF ⁴	20	1	0	097	15990.12
849-240CF ⁴	24	1	0	097	30458.37

⁴ Plug fabricated using Cap and pipe spigot.

Plug

Mipt



850-002C	1/4	50	900	090	21.35
850-003C	3/8	50	450	090	21.35
850-005C	1/2	50	500	090	18.56
850-007C	3/4	50	300	090	23.49
850-010C	1	25	175	090	38.67

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Plug (continued)

Mipt

850-012C	1-1/4	25	150	090	43.97
850-015C	1-1/2	25	150	090	48.45
850-020C	2	10	120	090	65.98
850-025C	2-1/2	5	30	090	112.01
850-030C	3	5	40	090	119.94
850-040C	4	5	0	090	212.83
850-060C	6	6	0	090	298.87
850-060CF ⁴	6	1	2	097	771.73
850-080C	8	6	0	090	531.08
850-080CF ⁴	8	1	2	097	1481.77
850-100CF ⁴	10	1	3	097	2138.73
850-120CF ⁴	12	1	0	097	3262.21

⁴ Plug fabricated using Cap and threaded pipe.

Wyes



Wye

Socket x Socket x Socket

1/2" - 2" - 235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

2-1/2" - 6" - 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8" - 10" & All Fabricated Sizes - 100 psi Maximum Internal Pressure Rating @ 73°F (23°C)

12" 80 psi Maximum Internal Pressure Rating @ 73°F (23°C)

875-005C	1/2	25	100	090	33.94
875-007C	3/4	25	0	090	35.05
875-010C	1	20	0	090	59.05
875-012C	1-1/4	20	0	090	89.45
875-015C	1-1/2	20	0	090	96.13
875-020C	2	10	0	090	235.40
875-025C	2-1/2	6	0	090	750.13
875-030C	3	5	0	090	1160.73
875-040C	4	4	0	090	1227.18
875-060C	6	3	0	090	1679.60
875-080C	8	1	0	090	2868.40
875-080CF ²	8	1	0	097	2508.81
875-100CF ²	10	1	0	097	4309.85
875-120CF ²	12	1	0	097	6002.97
875-140CF ²	14	1	0	097	20870.82
875-160CF ²	16	1	0	097	26178.84
875-180CF ²	18	1	0	097	37988.51
875-200CF ²	20	1	0	097	44121.68
875-240CF ²	24	1	0	097	56374.12

² Fiberglass reinforced

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Wyes					
Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP



Wye - Reducing

Socket x Socket x Socket

1/2" - 2" - 235 psi Maximum Internal Pressure Rating @ 73°F (23°C)
 2-1/2" - 6" - 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)
 8" -10" & All Fabricated Sizes - 100 psi Maximum Internal Pressure Rating @ 73°F (23°C)
 12" 80 psi Maximum Internal Pressure Rating @ 73°F (23°C)

875-101C ¹	3/4X1/2	25	0	090	50.11
875-130C ¹	1X1/2	20	0	090	82.57
875-131C ¹	1X3/4	20	0	090	82.57
875-166C ¹	1-1/4X1/2	20	0	090	150.46
875-167C ¹	1-1/4X3/4	20	0	090	150.46
875-168C ¹	1-1/4X1	20	0	090	150.46
875-209C ¹	1-1/2X1/2	20	0	090	165.07
875-210C ¹	1-1/2X3/4	20	0	090	165.07
875-211C ¹	1-1/2X1	20	0	090	165.07
875-212C ¹	1-1/2X1-1/4	20	0	090	165.07
875-247C ¹	2X1/2	10	0	090	326.61
875-248C ¹	2X3/4	10	0	090	326.61
875-249C ¹	2X1	10	0	090	326.61
875-250C ¹	2X1-1/4	10	0	090	326.61
875-251C ¹	2X1-1/2	10	0	090	326.61
875-335C ¹	3X1	5	0	090	1343.49
875-336C ¹	3X1-1/4	5	0	090	1343.49
875-337C ¹	3X1-1/2	5	0	090	1343.49
875-338C ¹	3X2	4	0	090	1343.49
875-339C ¹	3X2-1/2	5	0	090	1343.49
875-420C	4X2	4	0	090	1358.54
875-421C ¹	4X2-1/2	4	0	090	1429.52
875-422C	4X3	4	0	090	1358.54
875-528C ¹	6X2	5	0	090	1720.75
875-528CF ²	6X2	1	3	097	1350.03
875-530C ¹	6X3	5	0	090	1720.39
875-530CF ²	6X3	1	2	097	1501.03
875-532C	6X4	5	0	090	1313.65
875-578C ¹	8X2	2	0	090	4550.35
875-578CF ²	8X2	1	2	097	1814.84
875-579CF ²	8X2-1/2	1	2	097	1902.14
875-580C ¹	8X3	2	0	090	4550.35
875-580CF ²	8X3	1	2	097	1859.98
875-582C	8X4	2	0	090	4550.35
875-582CF ²	8X4	1	2	097	1910.23
875-585C ¹	8X6	1	0	090	4170.06
875-585CF ²	8X6	1	0	097	2653.52
875-621CF ²	10X2	1	0	097	2021.72
875-623CF ²	10X3	1	0	097	2152.31
875-624CF ²	10X4	1	0	097	2630.25
875-626C	10X6	1	0	091	4700.81
875-626CF ²	10X6	1	0	097	2986.46

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Wye - Reducing (continued)

Socket x Socket x Socket

875-628C	10X8	1	0	091	4949.47
875-628CF ²	10X8	1	0	097	3516.85
875-661CF ²	12X2	1	0	097	3335.68
875-663CF ²	12X3	1	0	097	3504.41
875-664CF ²	12X4	1	0	097	3997.52
875-666CF ²	12X6	1	0	097	4158.51
875-668CF ²	12X8	1	0	097	4389.29
875-670CF ²	12X10	1	0	097	5404.07
875-694CF ²	14X4	1	0	097	8947.58
875-696CF ²	14X6	1	0	097	9827.68
875-698CF ²	14X8	1	0	097	10631.06
875-700CF ²	14X10	1	0	097	12390.42
875-702CF ²	14X12	1	0	097	12951.09
875-754CF ²	16X4	1	0	097	11258.71
875-756CF ²	16X6	1	0	097	11854.86
875-758CF ²	16X8	1	0	097	13765.24
875-760CF ²	16X10	1	0	097	15470.20
875-762CF ²	16X12	1	0	097	16778.19
875-764CF ²	16X14	1	0	097	19932.60
875-784CF ²	18X4	1	0	097	11638.04
875-786CF ²	18X6	1	0	097	12791.33
875-788CF ²	18X8	1	0	097	14754.86
875-790CF ²	18X10	1	0	097	16290.59
875-792CF ²	18X12	1	0	097	18540.47
875-794CF ²	18X14	1	0	097	20338.09
875-796CF ²	18X16	1	0	097	21533.36

¹ Sized with Bushing
² Fiberglass reinforced



Double Wye

Socket x Socket x Socket x Socket

100 psi Maximum internal Pressure Rating @ 73°F (23°C)

876-020CF ²	2	1	4	097	977.02
876-030CF ²	3	1	4	097	1246.17
876-040CF ²	4	1	2	097	2136.69
876-060CF ²	6	1	0	097	3725.34
876-080CF ²	8	1	0	097	6681.22
876-100CF ²	10	1	0	097	7250.59
876-120CF ²	12	1	0	097	10863.19

² Fiberglass reinforced

For larger sizes please contact your Regional Spears® Distribution Center.

Double Wye - Reducing

Socket x Socket x Socket x Socket



Size 3" is 150 psi, all Fabricated Sizes- 100 psi Maximum Internal Pressure Rating @ 73°F (23°C)

876-338C	3X2	5	0	090	1447.26
876-420CF ²	4X2	1	2	097	1820.63
876-421CF ²	4X2-1/2	1	2	097	1926.71



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Wyes

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Double Wye - Reducing (continued)

Socket x Socket x Socket x Socket

876-422CF ²	4X3	1	2	097	2074.38
876-528CF ²	6X2	1	3	097	3096.42
876-529CF ²	6X2-1/2	1	2	097	3134.96
876-530CF ²	6X3	1	2	097	3185.99
876-532CF ²	6X4	1	0	097	3538.09
876-578CF ²	8X2	1	2	097	5291.59
876-579CF ²	8X2-1/2	1	2	097	5369.77
876-580CF ²	8X3	1	0	097	5412.29
876-582CF ²	8X4	1	0	097	5826.73
876-585CF ²	8X6	1	0	097	6142.65
876-621CF ²	10X2	1	0	097	6379.81
876-622CF ²	10X2-1/2	1	0	097	6512.87
876-623CF ²	10X3	1	0	097	6628.46
876-624CF ²	10X4	1	0	097	6781.71
876-626CF ²	10X6	1	0	097	7261.28
876-628CF ²	10X8	1	0	097	7626.71
876-661CF ²	12X2	1	0	097	6868.69
876-662CF ²	12X2-1/2	1	0	097	7197.99
876-663CF ²	12X3	1	0	097	7324.99
876-664CF ²	12X4	1	0	097	7593.22
876-666CF ²	12X6	1	0	097	8311.15
876-668CF ²	12X8	1	0	097	9429.39
876-670CF ²	12X10	1	0	097	10267.17

² Fiberglass reinforced

For larger sizes please contact your Regional Spears® Distribution Center.

Unions

Union 2000 - Socket/FKM

Socket x Socket with FKM O-ring Seal

1/4" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

857-002C	1/4	25	150	090	85.09
857-003C	3/8	25	150	090	85.09
8057-005C	1/2	20	120	090	56.62
8057-007C	3/4	20	80	090	59.15
8057-010C	1	15	90	090	71.01
8057-012C	1-1/4	10	0	090	143.62
8057-015C	1-1/2	10	0	090	146.23
8057-020C	2	5	0	090	242.43
8057-025C	2-1/2	5	0	090	397.56
8057-030C	3	5	0	090	503.15
8057-040C	4	4	0	090	642.81
8057-060C	6	1	0	090	1428.51



Union 2000 - Socket/EPDM

Socket x Socket with EPDM O-ring Seal

1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

897-002C	1/4	25	150	090	84.07
897-003C	3/8	25	150	090	84.07
8097-005C	1/2	20	120	090	56.43
8097-007C	3/4	20	80	090	58.45
8097-010C	1	15	90	090	70.01
8097-012C	1-1/4	10	0	090	141.78
8097-015C	1-1/2	10	0	090	144.45
8097-020C	2	5	0	090	239.44
8097-025C	2-1/2	5	0	090	396.52
8097-030C	3	5	0	090	496.97
8097-040C	4	4	0	090	635.54
8097-060C	6	1	0	090	1412.27



Union 2000 - Socket/Fipt/FKM

Socket x Fipt with FKM O-ring Seal

1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8059-005C	1/2	20	120	090	64.43
8059-007C	3/4	20	80	090	112.44
8059-010C	1	15	90	090	155.24
8059-012C	1-1/4	10	0	090	263.43
8059-015C	1-1/2	10	0	090	295.67
8059-020C	2	5	0	090	334.27
8059-025C	2-1/2	5	0	090	542.64
8059-030C	3	5	0	090	641.83
8059-040C	4	4	0	090	742.17
8059-060C	6	1	0	090	1429.73



Union 2000 - Socket/Fipt/EPDM

Socket x Fipt with EPDM O-ring Seal

1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8099-005C	1/2	20	120	090	62.84
8099-007C	3/4	20	80	090	111.14
8099-010C	1	15	90	090	153.28
8099-012C	1-1/4	10	0	090	292.01
8099-015C	1-1/2	10	0	090	292.01
8099-020C	2	5	0	090	330.09
8099-025C	2-1/2	5	0	090	472.88
8099-030C	3	5	0	090	633.94
8099-040C	4	4	0	090	731.28
8099-060C	6	1	0	090	1365.07



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Unions

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union 2000 - Socket/Spigot/FKM

Socket x Spigot with FKM O-ring Seal



1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8056-005C	1/2	20	160	090	56.62
8056-007C	3/4	20	160	090	59.15
8056-010C	1	15	90	090	71.01
8056-012C	1-1/4	10	0	090	143.62
8056-015C	1-1/2	10	0	090	146.23
8056-020C	2	5	0	090	242.43
8056-025C	2-1/2	5	0	090	442.94
8056-030C	3	5	0	090	503.15
8056-040C	4	4	0	090	642.81
8056-060C	6	1	0	090	1428.51

Union 2000 - Socket/Spigot/EPDM

Socket x Spigot with EPDM O-ring Seal



1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8096-005C	1/2	20	160	090	56.43
8096-007C	3/4	20	80	090	58.45
8096-010C	1	15	90	090	70.01
8096-012C	1-1/4	10	0	090	141.78
8096-015C	1-1/2	10	0	090	144.45
8096-020C	2	5	0	090	239.44
8096-025C	2-1/2	5	0	090	396.52
8096-030C	3	5	0	090	496.97
8096-040C	4	4	0	090	635.54
8096-060C	6	1	0	090	1412.27

Union 2000 - Fipt/Mipt/FKM

Fipt x Mipt with FKM O-ring Seal



1/2" - 3" 235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8053-005C	1/2	20	120	090	56.62
8053-007C	3/4	20	0	090	59.15
8053-010C	1	15	90	090	71.01
8053-012C	1-1/4	10	0	090	143.62
8053-015C	1-1/2	10	0	090	146.23
8053-020C	2	5	0	090	242.43
8053-030C	3	5	0	090	503.15

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union 2000 - Fipt/Mipt/EPDM

Fipt x Mipt with EPDM O-ring Seal



1/2" - 3" 235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8093-005C	1/2	20	120	090	56.43
8093-007C	3/4	20	0	090	58.45
8093-010C	1	15	90	090	70.01
8093-012C	1-1/4	10	0	090	141.78
8093-015C	1-1/2	10	0	090	144.45
8093-020C	2	5	0	090	239.44
8093-030C	3	5	0	090	496.97

Union 2000 - Fipt/Mipt/FKM- Reducing

Fipt x Mipt with FKM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8053-168C	1-1/4X1	10	0	090	160.94
-----------	---------	----	---	-----	--------

Union 2000 - Fipt/Mipt/EPDM-Reducing

Fipt x Mipt with EPDM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8093-168C	1-1/4X1	10	0	090	158.42
-----------	---------	----	---	-----	--------

Union 2000 - Socket/Mipt/FKM

Socket x Mipt with FKM O-ring Seal



1/2" - 3" 235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8054-005C	1/2	20	120	090	56.62
8054-007C	3/4	20	0	090	59.15
8054-010C	1	15	90	090	71.01
8054-012C	1-1/4	10	0	090	143.62
8054-015C	1-1/2	10	0	090	146.23
8054-020C	2	5	0	090	242.43
8054-030C	3	5	0	090	503.15

Union 2000 - Socket/Mipt/EPDM

Socket x Mipt with EPDM O-ring Seal



1/2" - 3" 235 psi Max Int. Pressure @ 73°F (23°C)

8094-005C	1/2	20	120	090	56.43
8094-007C	3/4	20	80	090	58.45
8094-010C	1	15	90	090	70.01
8094-012C	1-1/4	10	0	090	141.78
8094-015C	1-1/2	10	0	090	144.45
8094-020C	2	5	0	090	239.44



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Unions

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union 2000 - Socket/Mipt/EPDM (continued)

Socket x Mipt with EPDM O-ring Seal

8094-030C	3	5	0	090	496.97
-----------	---	---	---	-----	--------

Union 2000 - Socket/Mipt/FKM-Reducing

Socket x Mipt with FKM O-ring Seal

235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8054-168C	1-1/4X1	10	0	090	160.94
-----------	---------	----	---	-----	--------

Union 2000 - Socket/Mipt/EPDM -Reducing

Socket x Mipt with EPDM O-ring Seal

235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8094-168C	1-1/4X1	10	0	090	158.42
-----------	---------	----	---	-----	--------

Union 2000 - Special Reinforced Fipt/Spigot/FKM

SR Fipt x Spigot with FKM O-ring Seal

1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8055-005CSR	1/2	20	160	096	74.52
8055-007CSR	3/4	20	160	096	78.41
8055-010CSR	1	15	90	096	99.96
8055-012CSR	1-1/4	10	0	096	160.63
8055-015CSR	1-1/2	10	0	096	183.89
8055-020CSR	2	5	0	096	282.52
8055-025CSR	2-1/2	5	0	096	533.23
8055-030CSR	3	5	0	096	563.47
8055-040CSR	4	4	0	096	727.86
8055-060CSR	6	1	0	096	865.87

Union 2000 - Special Reinforced Fipt/Spigot/EPDM

SR Fipt x Spigot with EPDM O-ring Seal

1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8095-005CSR	1/2	20	120	096	73.83
8095-007CSR	3/4	20	160	096	76.36
8095-010CSR	1	15	90	096	97.93
8095-012CSR	1-1/4	10	0	096	150.43
8095-015CSR	1-1/2	10	0	096	170.85
8095-020CSR	2	5	0	096	257.82
8095-025CSR	2-1/2	5	0	096	511.71
8095-030CSR	3	5	0	096	551.65
8095-040CSR	4	4	0	096	696.11
8095-060CSR	6	1	0	096	844.61

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union 2000 - Fipt/FKM

Fipt x Fipt with FKM O-ring Seal

1/4" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

858-002C	1/4	25	150	090	95.67
858-003C	3/8	25	150	090	95.67
8058-005C	1/2	20	120	090	60.61
8058-007C	3/4	20	80	090	107.16
8058-010C	1	15	90	090	147.78
8058-012C	1-1/4	10	0	090	281.57
8058-015C	1-1/2	10	0	090	281.57
8058-020C	2	5	0	090	318.29
8058-025C	2-1/2	5	0	090	512.75
8058-030C	3	5	0	090	972.97
8058-040C	4	4	0	090	1045.85
8058-060C	6	1	0	090	1493.60

Union 2000 - Fipt/EPDM

Fipt x Fipt with EPDM O-ring Seal

1/4" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

898-002C	1/4	25	150	090	94.54
898-003C	3/8	25	100	090	94.54
8098-005C	1/2	20	120	090	59.87
8098-007C	3/4	20	80	090	105.86
8098-010C	1	15	90	090	145.97
8098-012C	1-1/4	10	0	090	278.33
8098-015C	1-1/2	10	0	090	278.33
8098-020C	2	5	0	090	314.40
8098-025C	2-1/2	5	0	090	442.94
8098-030C	3	5	0	090	881.25
8098-040C	4	4	0	090	1025.97
8098-060C	6	1	0	090	1436.06

Union 2000 - Socket/Special Reinforced Fipt/FKM

Socket x SR Fipt with FKM O-ring Seal

1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8059-005CSR	1/2	20	120	096	33.36
8059-007CSR	3/4	20	160	096	58.85
8059-010CSR	1	15	90	096	81.06
8059-012CSR	1-1/4	10	0	096	154.54
8059-015CSR	1-1/2	10	0	096	168.00
8059-020CSR	2	5	0	096	174.87
8059-025CSR	2-1/2	5	0	096	302.82
8059-030CSR	3	5	0	096	491.99
8059-040CSR	4	4	0	096	573.99
8059-060CSR	6	1	0	096	1572.60

Schedule 80 CPVC Product
CPVC Schedule 80 Fittings



Unions

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union 2000 - Socket/Special Reinforced Fipt/EPDM

Socket x SR Fipt w/EPDM O-ring Seal - Stainless Steel Collar



1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8099-005CSR	1/2	20	120	096	32.71
8099-007CSR	3/4	20	160	096	58.03
8099-010CSR	1	15	90	096	80.39
8099-012CSR	1-1/4	10	0	096	152.27
8099-015CSR	1-1/2	10	0	096	165.62
8099-020CSR	2	5	0	096	174.41
8099-025CSR	2-1/2	5	0	096	299.13
8099-030CSR	3	5	0	096	485.80
8099-040CSR	4	4	0	096	570.54
8099-060CSR	6	1	0	096	1532.95

Union 2000 - Special Reinforced Fipt/FKM

SR Fipt x SR Fipt w/FKM O-ring Seal - Stainless Steel Collar



1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8058-005CSR	1/2	20	120	096	34.23
8058-007CSR	3/4	20	80	096	59.64
8058-010CSR	1	15	90	096	81.98
8058-012CSR	1-1/4	10	0	096	154.54
8058-015CSR	1-1/2	10	0	096	168.65
8058-020CSR	2	5	0	096	177.69
8058-025CSR	2-1/2	5	0	096	307.62
8058-030CSR	3	5	0	096	502.14
8058-040CSR	4	4	0	096	588.24
8058-060CSR	6	1	0	096	1579.19

Union 2000 - Special Reinforced Fipt/EPDM

SR Fipt x SR Fipt w/EPDM O-ring Seal - Stainless Steel Collar



1/2" - 4" 235 psi; 6" 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8098-005CSR	1/2	20	160	096	33.07
8098-007CSR	3/4	20	80	096	59.09
8098-010CSR	1	15	90	096	81.06
8098-012CSR	1-1/4	10	0	096	153.03
8098-015CSR	1-1/2	10	0	096	167.33
8098-020CSR	2	5	0	096	175.93
8098-025CSR	2-1/2	5	0	096	304.07
8098-030CSR	3	5	0	096	494.35
8098-040CSR	4	4	0	096	572.33
8098-060CSR	6	1	0	096	1552.15

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union (Old Style) - Socket/FKM

Socket x Socket with FKM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

857-005C	1/2	15	90	090	56.62
857-007C	3/4	10	60	090	59.15
857-010C	1	10	40	090	71.01
857-012C	1-1/4	5	20	090	143.62
857-015C	1-1/2	5	0	090	146.23
857-020C	2	5	0	090	242.43
857-025C	2-1/2	5	0	090	397.56
857-030C	3	5	0	090	503.15
857-040C	4	4	0	090	642.81

Union (Old Style) - Socket/EPDM

Socket x Socket with EPDM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

897-005C	1/2	15	90	090	56.43
897-007C	3/4	10	60	090	58.45
897-010C	1	10	40	090	70.01
897-012C	1-1/4	5	20	090	141.78
897-015C	1-1/2	5	0	090	144.45
897-020C	2	5	0	090	239.44
897-025C	2-1/2	5	0	090	396.52
897-030C	3	5	0	090	496.97
897-040C	4	4	0	090	635.54

Union (Old Style) - Socket/Fipt/FKM

Socket x Fipt with FKM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

859-005C	1/2	15	90	090	64.43
859-007C	3/4	10	40	090	112.44
859-010C	1	10	40	090	155.24
859-012C	1-1/4	5	20	090	263.43
859-015C	1-1/2	5	0	090	295.67
859-020C	2	5	0	090	334.27
859-025C	2-1/2	5	0	090	542.64
859-030C	3	5	0	090	641.83
859-040C	4	4	0	090	742.17

Union (Old Style) - Socket/Fipt/EPDM

Socket x Fipt with EPDM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

899-005C	1/2	15	90	090	62.84
899-007C	3/4	10	60	090	111.14
899-010C	1	10	40	090	153.28
899-012C	1-1/4	5	20	090	292.01



Schedule 80 CPVC Product
CPVC Schedule 80 Fittings

Unions

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union (Old Style) - Socket/Fipt/EPDM (continued)

Socket x Fipt with EPDM O-ring Seal

899-015C	1-1/2	5	0	090	292.01
899-020C	2	5	0	090	330.09
899-025C	2-1/2	5	0	090	472.88
899-030C	3	5	0	090	633.94
899-040C	4	4	0	090	731.28

Union - Socket/Brass Fipt/FKM

Socket x Fipt with Brass Thread Insert & FKM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

859-005CBR	1/2	10	60	096	211.80
859-007CBR	3/4	10	20	096	302.21
859-010CBR	1	10	0	096	336.61
859-012CBR	1-1/4	5	0	096	564.27
859-015CBR	1-1/2	5	0	096	641.25
859-020CBR	2	5	0	096	724.75

Not intended to convey or dispense water for human consumption through drinking or cooking

Union - Socket/Brass Fipt/EPDM

Socket x Fipt with Brass Thread Insert & EPDM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

899-005CBR	1/2	10	60	096	219.71
899-007CBR	3/4	10	40	096	297.08
899-010CBR	1	10	0	096	332.49
899-012CBR	1-1/4	5	20	096	557.15
899-015CBR	1-1/2	5	0	096	633.03
899-020CBR	2	5	0	096	715.83

Not intended to convey or dispense water for human consumption through drinking or cooking

Union (Old Style) - Fipt/FKM

Fipt x Fipt with FKM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

858-005C	1/2	15	90	090	60.61
858-007C	3/4	10	60	090	107.16
858-010C	1	10	40	090	147.78
858-012C	1-1/4	5	20	090	281.57
858-015C	1-1/2	5	0	090	281.57
858-020C	2	5	0	090	318.29
858-025C	2-1/2	5	0	090	512.75
858-030C	3	5	0	090	972.97
858-040C	4	4	0	090	1045.85

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Union (Old Style) - Fipt/EPDM

Fipt x Fipt with EPDM O-ring Seal



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

898-005C	1/2	15	90	090	59.87
898-007C	3/4	10	60	090	105.86
898-010C	1	10	40	090	145.97
898-012C	1-1/4	5	20	090	278.33
898-015C	1-1/2	5	0	090	278.33
898-020C	2	5	0	090	314.40
898-025C	2-1/2	5	0	090	442.94
898-030C	3	5	0	090	881.25
898-040C	4	4	0	090	1025.97

Union (Old Style) - Socket/Special Reinforced Fipt/FKM

Socket x SR Fipt w/FKM O-ring Seal - Stainless Steel Collar



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

859-002CSR	1/4	25	150	096	52.49
859-003CSR	3/8	25	100	096	52.49
859-005CSR	1/2	10	60	096	33.36
859-007CSR	3/4	10	60	096	58.85
859-010CSR	1	10	40	096	81.06
859-012CSR	1-1/4	5	20	096	154.54
859-015CSR	1-1/2	5	0	096	168.00
859-020CSR	2	5	0	096	174.87
859-030CSR	3	5	0	096	491.99
859-040CSR	4	4	0	096	573.99

Union (Old Style) - Socket/Special Reinforced Fipt/EPDM

Socket x SR Fipt w/EPDM O-ring Seal -Stainless Steel Collar



235 psi Maximum Internal Pressure Rating @ 73°F (23°C)

899-002CSR	1/4	25	150	096	52.15
899-003CSR	3/8	25	100	096	52.15
899-005CSR	1/2	10	60	096	32.71
899-007CSR	3/4	10	40	096	58.03
899-010CSR	1	10	40	096	80.39
899-012CSR	1-1/4	5	20	096	152.27
899-015CSR	1-1/2	5	0	096	165.62
899-020CSR	2	5	0	096	174.41
899-030CSR	3	5	0	096	485.80
899-040CSR	4	4	0	096	570.54

Tank Adapters



Tank Adapters

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapters, CPVC New Style Standard with Neoprene Gaskets

Socket x Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8170-002C	1/4	25	150	101	99.94
8170-003C	3/8	25	150	101	99.94
8170-005C	1/2	25	0	101	99.94
8170-007C	3/4	25	0	101	118.88
8170-010C	1	25	0	101	133.43
8170-012C	1-1/4	20	0	101	170.19
8170-015C	1-1/2	20	0	101	185.33
8170-020C	2	15	0	101	261.62
8170-025C	2-1/2	4	0	101	384.49
8170-030C	3	4	0	101	457.67
8170-040C	4	2	0	101	762.72
8170-060C	6	1	0	101	2097.48
8170-080C	8	1	0	101	4660.73



Tank Adapters, CPVC New Style Standard with EPDM Gaskets

Socket x Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8170E-002C	1/4	25	150	101	113.66
8170E-003C	3/8	25	150	101	113.66
8170E-005C	1/2	25	0	101	113.66
8170E-007C	3/4	25	0	101	127.58
8170E-010C	1	25	0	101	148.13
8170E-012C	1-1/4	20	0	101	187.46
8170E-015C	1-1/2	20	0	101	196.71
8170E-020C	2	15	0	101	283.57
8170E-025C	2-1/2	4	0	101	402.78
8170E-030C	3	4	0	101	479.57
8170E-040C	4	2	0	101	796.02
8170E-060C	6	1	0	101	2184.86
8170E-080C	8	1	0	101	4796.97



Tank Adapters, CPVC New Style Standard with FKM Gaskets

Socket x Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8170V-002C	1/4	25	150	101	149.01
8170V-003C	3/8	25	150	101	149.01
8170V-005C	1/2	25	0	101	149.01
8170V-007C	3/4	25	0	101	171.45
8170V-010C	1	25	0	101	198.45
8170V-012C	1-1/4	20	0	101	243.85
8170V-015C	1-1/2	20	0	101	254.20
8170V-020C	2	15	0	101	384.84
8170V-025C	2-1/2	4	0	101	553.89



Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapters, CPVC New Style Standard with FKM Gaskets

(continued)

Socket x Socket

8170V-030C	3	4	0	101	659.44
8170V-040C	4	2	0	101	1460.61
8170V-060C	6	1	0	101	3670.69
8170V-080C	8	1	0	101	8586.72

Tank Adapters, CPVC New Style Standard with Neoprene Gaskets

Socket x Fipt

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8171-002C	1/4	25	150	101	99.94
8171-003C	3/8	25	200	101	99.94
8171-005C	1/2	25	0	101	99.94
8171-007C	3/4	25	0	101	118.88
8171-010C	1	25	0	101	133.43
8171-012C	1-1/4	20	0	101	170.19
8171-015C	1-1/2	20	0	101	185.33
8171-020C	2	15	0	101	261.62
8171-025C	2-1/2	4	0	101	384.49
8171-030C	3	4	0	101	457.67
8171-040C	4	2	0	101	762.72
8171-060C	6	1	0	101	2097.48



Tank Adapters, CPVC New Style Standard with EPDM Gaskets

Socket x Fipt

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8171E-002C	1/4	25	150	101	113.66
8171E-003C	3/8	25	200	101	113.66
8171E-005C	1/2	25	0	101	113.66
8171E-007C	3/4	25	0	101	127.58
8171E-010C	1	25	0	101	148.13
8171E-012C	1-1/4	20	0	101	187.46
8171E-015C	1-1/2	20	0	101	196.71
8171E-020C	2	15	0	101	283.57
8171E-025C	2-1/2	4	0	101	402.78
8171E-030C	3	4	0	101	479.57
8171E-040C	4	2	0	101	796.02
8171E-060C	6	1	0	101	2184.84



Tank Adapters, CPVC New Style Standard with FKM Gaskets

Socket x Fipt

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8171V-002C	1/4	25	150	101	149.01
8171V-003C	3/8	25	200	101	149.01
8171V-005C	1/2	25	0	101	149.01
8171V-007C	3/4	25	0	101	171.45
8171V-010C	1	25	0	101	198.45
8171V-012C	1-1/4	20	0	101	243.85



**Tank Adapters**

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapters, CPVC New Style Standard with FKM Gaskets

(continued)

Socket x Fipt

8171V-015C	1-1/2	20	0	101	254.20
8171V-020C	2	15	0	101	384.84
8171V-025C	2-1/2	4	0	101	553.98
8171V-030C	3	4	0	101	659.44
8171V-040C	4	2	0	101	1460.61
8171V-060C	6	1	0	101	3670.69

Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with Neoprene Gaskets**Socket x SR Fipt - Stainless Steel Collar**

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8171-002CSR	1/4	25	150	101	102.97
8171-003CSR	3/8	25	200	101	102.97
8171-005CSR	1/2	25	0	101	102.97
8171-007CSR	3/4	25	0	101	123.24
8171-010CSR	1	25	0	101	139.41
8171-012CSR	1-1/4	20	0	101	179.85
8171-015CSR	1-1/2	20	0	101	201.88
8171-020CSR	2	15	0	101	279.17
8171-025CSR	2-1/2	4	0	101	424.71
8171-030CSR	3	4	0	101	505.48
8171-040CSR	4	2	0	101	812.36
8171-060CSR	6	1	0	101	2145.52

Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with EPDM Gaskets**Socket x SR Fipt - Stainless Steel Collar**

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8171E-002CSR	1/4	25	150	101	116.71
8171E-003CSR	3/8	25	200	101	116.71
8171E-005CSR	1/2	25	0	101	116.71
8171E-007CSR	3/4	25	0	101	131.89
8171E-010CSR	1	25	0	101	157.71
8171E-012CSR	1-1/4	20	0	101	197.09
8171E-015CSR	1-1/2	20	0	101	213.23
8171E-020CSR	2	15	0	101	301.46
8171E-025CSR	2-1/2	4	0	101	442.97
8171E-030CSR	3	4	0	101	527.35
8171E-040CSR	4	2	0	101	845.54
8171E-060CSR	6	2	0	101	2232.95

Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with FKM Gaskets**Socket x SR Fipt - Stainless Steel Collar**

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8171V-002CSR	1/4	25	150	101	152.03
8171V-003CSR	3/8	25	200	101	152.03

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapters, CPVC New Style Special Reinforced (SR)

Threaded with FKM Gaskets (continued)

Socket x SR Fipt - Stainless Steel Collar

8171V-005CSR	1/2	25	0	101	152.03
8171V-007CSR	3/4	25	0	101	175.77
8171V-010CSR	1	25	0	101	204.48
8171V-012CSR	1-1/4	20	0	101	253.48
8171V-015CSR	1-1/2	20	0	101	270.67
8171V-020CSR	2	15	0	101	403.07
8171V-025CSR	2-1/2	4	0	101	593.94
8171V-030CSR	3	4	0	101	707.26
8171V-040CSR	4	2	0	101	1510.13
8171V-060CSR	6	2	0	101	3728.48

Tank Adapters, CPVC New Style Standard with Neoprene Gaskets**Fipt x Fipt**

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172-002C	1/4	25	150	101	133.43
8172-003C	3/8	25	200	101	133.43
8172-005C	1/2	25	0	101	133.43
8172-007C	3/4	25	0	101	154.06
8172-010C	1	25	0	101	168.53
8172-012C	1-1/4	20	0	101	237.94
8172-015C	1-1/2	20	0	101	260.09
8172-020C	2	15	0	101	324.15
8172-025C	2-1/2	4	0	101	456.18
8172-030C	3	4	0	101	543.03
8172-040C	4	2	0	101	857.99
8172-060C	6	1	0	101	2383.48

Tank Adapters, CPVC New Style Standard with EPDM Gaskets**Fipt x Fipt**

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172E-002C	1/4	25	150	101	138.67
8172E-003C	3/8	25	200	101	138.67
8172E-005C	1/2	25	0	101	138.67
8172E-007C	3/4	25	0	101	163.49
8172E-010C	1	25	0	101	176.19
8172E-012C	1-1/4	20	0	101	247.51
8172E-015C	1-1/2	20	0	101	282.48
8172E-020C	2	15	0	101	349.09
8172E-025C	2-1/2	4	0	101	513.24
8172E-030C	3	4	0	101	611.05
8172E-040C	4	2	0	101	1017.35
8172E-060C	6	1	0	101	2419.47

Tank Adapters



Tank Adapters

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapters, CPVC New Style Standard with FKM Gaskets

Fipt x Fipt

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172V-002C	1/4	25	150	101	214.60
8172V-003C	3/8	25	200	101	214.60
8172V-005C	1/2	25	0	101	214.60
8172V-007C	3/4	25	0	101	241.89
8172V-010C	1	25	0	101	278.36
8172V-012C	1-1/4	20	0	101	341.45
8172V-015C	1-1/2	20	0	101	353.29
8172V-020C	2	15	0	101	550.38
8172V-025C	2-1/2	4	0	101	781.04
8172V-030C	3	4	0	101	929.68
8172V-040C	4	2	0	101	2444.94
8172V-060C	6	1	0	101	4481.22



Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with Neoprene Gaskets

Fipt x SR Fipt - Stainless Steel Collar

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172-002CSR	1/4	25	150	101	136.40
8172-003CSR	3/8	25	200	101	136.40
8172-005CSR	1/2	25	0	101	136.40
8172-007CSR	3/4	25	0	101	158.40
8172-010CSR	1	25	0	101	174.53
8172-012CSR	1-1/4	20	0	101	247.58
8172-015CSR	1-1/2	20	0	101	276.60
8172-020CSR	2	15	0	101	342.00
8172-025CSR	2-1/2	4	0	101	496.35
8172-030CSR	3	4	0	101	590.92
8172-040CSR	4	2	0	101	907.58
8172-060CSR	6	2	0	101	2431.54



Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with EPDM Gaskets

Fipt x SR Fipt - Stainless Steel Collar

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172E-002CSR	1/4	25	150	101	141.75
8172E-003CSR	3/8	25	200	101	141.75
8172E-005CSR	1/2	25	0	101	141.75
8172E-007CSR	3/4	25	0	101	167.81
8172E-010CSR	1	25	0	101	182.20
8172E-012CSR	1-1/4	20	0	101	257.18
8172E-015CSR	1-1/2	20	0	101	298.99
8172E-020CSR	2	15	0	101	366.97
8172E-025CSR	2-1/2	4	0	101	553.60
8172E-030CSR	3	4	0	101	659.05
8172E-040CSR	4	2	0	101	1066.92



Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with EPDM Gaskets (continued)

Fipt x SR Fipt - Stainless Steel Collar

8172E-060CSR	6	1	0	101	2467.49
--------------	---	---	---	-----	---------

Tank Adapters, CPVC New Style Special Reinforced (SR) Threaded with FKM Gaskets

Fipt x SR Fipt - Stainless Steel Collar

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172V-002CSR	1/4	25	150	101	217.64
8172V-003CSR	3/8	25	200	101	217.64
8172V-005CSR	1/2	25	0	101	217.64
8172V-007CSR	3/4	25	0	101	246.22
8172V-010CSR	1	25	0	101	284.38
8172V-012CSR	1-1/4	20	0	101	351.09
8172V-015CSR	1-1/2	20	0	101	369.77
8172V-020CSR	2	15	0	101	568.28
8172V-025CSR	2-1/2	4	0	101	821.15
8172V-030CSR	3	4	0	101	977.56
8172V-040CSR	4	2	0	101	2494.51
8172V-060CSR	6	2	0	101	4529.35



Tank Adapter, CPVC Self Aligning with Neoprene Gasket

Fipt

75 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172SA-010C	1	5	0	101	436.92
8172SA-020C	2	4	0	101	659.44
8172SA-030C	3	2	0	101	1027.55

Tank adapter body is larger than size listed. Refer to installation instructions for minimum hole size.



Tank Adapter, CPVC Self Aligning with EPDM Gasket

Fipt

75 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172ESA-010C	1	5	0	101	459.36
8172ESA-020C	2	4	0	101	695.62
8172ESA-030C	3	2	0	101	1081.94

Tank adapter body is larger than size listed. Refer to installation instructions for minimum hole size.



Tank Adapter, CPVC Self Aligning with FKM Gasket

Fipt

75 psi Maximum Internal Pressure Rating @ 73°F (23°C)

8172VSA-010C	1	5	0	101	907.87
8172VSA-020C	2	4	0	101	1374.22
8172VSA-030C	3	2	0	101	2135.15

Tank adapter body is larger than size listed. Refer to installation instructions for minimum hole size.





Tank Adapters

Tank Adapters

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapter, CPVC Old Style with Neoprene Gasket

Socket x Fipt



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

871-005C	1/2	25	0	101	99.94
871-007C	3/4	25	0	101	118.88
871-010C	1	25	0	101	133.43
871-012C	1-1/4	20	0	101	170.19
871-015C	1-1/2	20	0	101	185.33
871-020C	2	15	0	101	261.62
871-030C	3	4	0	101	457.67
871-040C	4	2	0	101	762.72

Tank Adapter, CPVC Old Style with Neoprene Gasket

Fipt x Fipt



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

872-005C	1/2	25	0	101	133.43
872-007C	3/4	25	0	101	154.06
872-010C	1	25	0	101	168.53
872-012C	1-1/4	20	0	101	237.94
872-015C	1-1/2	20	0	101	260.09
872-020C	2	15	0	101	324.15
872-030C	3	4	0	101	543.03
872-040C	4	2	0	101	857.99

Tank Adapter Gasket Only - Neoprene (New Style)

3N-002	1/4	100	0	299	5.61
3N-003	3/8	50	0	299	5.61
3N-005	1/2	10	0	299	5.61
3N-007	3/4	10	0	299	6.02
3N-010	1	10	0	299	6.39
3N-012	1-1/4	10	0	299	8.84
3N-015	1-1/2	10	0	299	10.35
3N-020	2	10	0	299	13.56
3N-025	2-1/2	10	0	299	14.14
3N-030	3	10	0	299	14.78
3N-040	4	50	0	299	40.83
2N-060	6	10	0	299	51.01
3N-080	8	10	0	299	233.94

Tank Adapter Gasket Only - EPDM (New Style)

3E-002	1/4	10	0	299	3.46
3E-003	3/8	10	0	299	3.97

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapter Gasket Only - EPDM (New Style) (continued)

3E-005	1/2	10	0	299	5.34
3E-007	3/4	10	0	299	5.64
3E-010	1	10	0	299	8.12
3E-012	1-1/4	10	0	299	17.07
3E-015	1-1/2	10	0	299	17.54
3E-020	2	10	0	299	20.09
3E-025	2-1/2	10	0	299	28.44
3E-030	3	10	0	299	30.61
3E-040	4	10	0	299	46.07
2E-060	6	10	0	299	83.19
3E-080	8	10	0	299	219.86

Tank Adapter Gasket Only - FKM (New Style)

3V-002	1/4	10	0	299	21.23
3V-003	3/8	10	0	299	26.98
3V-005	1/2	10	0	299	34.35
3V-007	3/4	10	0	299	38.07
3V-010	1	10	0	299	41.59
3V-012	1-1/4	10	0	299	77.83
3V-015	1-1/2	10	0	299	83.55
3V-020	2	10	0	299	107.64
3V-025	2-1/2	10	0	299	131.16
3V-030	3	10	0	299	236.54
3V-040	4	10	0	299	294.61
2V-060	6	10	0	299	1039.93
3V-080	8	10	0	299	1673.66

Tank Adapter Gasket Only - Neoprene (Old Style)

2N-005	1/2	10	0	299	5.61
2N-007	3/4	10	0	299	6.02
2N-010	1	10	0	299	6.39
2N-015	1-1/4 OR 1-1/2	10	0	299	10.35
2N-020	2	10	0	299	13.56
2N-030	3	10	0	299	14.78
2N-040	4	10	0	299	40.83

Tank Adapter Gasket Only - EPDM (Old Style)

2E-005	1/2	10	0	299	6.49
2E-007	3/4	10	0	299	6.73
2E-010	1	10	0	299	11.66
2E-015	1-1/4 OR 1-1/2	10	0	299	17.54
2E-020	2	10	0	299	20.09
2E-030	3	10	0	299	30.61
2E-040	4	10	0	299	46.07

Schedule 80 CPVC Product
Tank Adapters & Pipe Flanges



Tank Adapters

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Tank Adapter Wrench Sets (New Style)

Body Wrench & Nut Wrench



TAW-002	1/4	1	25	299	45.25
TAW-003	3/8	1	25	299	45.25
TAW-005	1/2	1	25	299	45.25
TAW-007	3/4	1	25	299	46.14
TAW-010	1	1	25	299	47.99
TAW-012	1-1/4	1	20	299	54.14
TAW-015	1-1/2	1	20	299	58.71
TAW-020	2	1	10	299	66.88
TAW-025	2-1/2	1	10	299	73.99
TAW-030	3	1	10	299	81.56
TAW-040	4	1	10	299	87.36

Tank Adapter Individual Body Wrench (New Style)

TAW1-002	1/4	500	0	299	25.40
TAW1-003	3/8	400	0	299	25.40
TAW1-005	1/2	250	0	299	25.40
TAW1-007	3/4	220	0	299	25.88
TAW1-010	1	200	0	299	26.95
TAW1-012	1-1/4	300	0	299	30.52
TAW1-015	1-1/2	150	0	299	32.87
TAW1-020	2	100	0	299	35.69
TAW1-025	2-1/2	80	0	299	37.29
TAW1-030	3	74	0	299	46.76
TAW1-040	4	35	0	299	48.11

Tank Adapter Individual Nut Wrench (New Style)

TAW2-002	1/4	300	0	299	25.40
TAW2-003	3/8	250	0	299	25.40
TAW2-005	1/2	200	0	299	25.40
TAW2-007	3/4	160	0	299	25.88
TAW2-010	1	110	0	299	26.95
TAW2-012	1-1/4	200	0	299	30.52
TAW2-015	1-1/2	120	0	299	32.87
TAW2-020	2	100	0	299	35.69
TAW2-025	2-1/2	50	0	299	37.29
TAW2-030	3	40	0	299	46.76
TAW2-040	4	35	0	299	48.11

Pipe Flanges

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange One Piece

Socket



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

851-005C	1/2	25	0	090	92.61
851-007C	3/4	25	0	090	94.76
851-010C	1	15	0	090	103.43
851-012C	1-1/4	15	0	090	126.28
851-015C	1-1/2	20	0	090	140.15
851-020C	2	10	0	090	170.60
851-025C	2-1/2	10	0	090	351.54
851-030C	3	10	0	090	367.58
851-040C	4	5	0	090	496.65
851-050C	5	5	0	090	910.18
851-060C	6	5	0	090	910.18
851-080C	8	2	0	090	2539.52
851-100C	10	2	0	091	3169.07
851-120C	12	2	0	091	4451.49

Flange One Piece

Fipt



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

852-005C	1/2	25	0	090	129.49
852-007C	3/4	25	0	090	156.98
852-010C	1	15	0	090	172.11
852-012C	1-1/4	15	0	090	237.72
852-015C	1-1/2	20	0	090	251.67
852-020C	2	10	0	090	256.32
852-025C	2-1/2	10	0	090	416.01
852-030C	3	10	0	090	412.80
852-040C	4	5	0	090	641.69
852-060CF	6	1	8	097	958.77
852-080CF	8	1	2	097	2374.88

Flange - Special Reinforced One Piece Threaded

SR Fipt - Stainless Steel Collar



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

852-005CSR	1/2	25	0	096	71.15
852-007CSR	3/4	25	0	096	86.34
852-010CSR	1	15	0	096	94.44
852-012CSR	1-1/4	15	0	096	130.73
852-015CSR	1-1/2	15	0	096	138.61
852-020CSR	2	10	0	096	141.96
852-025CSR	2-1/2	10	0	096	228.35
852-030CSR	3	10	0	096	226.59
852-040CSR	4	5	0	096	424.64



Pipe Flanges

Pipe Flanges

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------



Flange - Blind

1/2" - 12" Molded - 150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

14" - 24" Fabricated - 50 psi Maximum Internal Pressure Rating @ 73°F (23°C)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
853-005C	1/2	25	100	090	83.27
853-007C	3/4	25	0	090	90.29
853-010C	1	20	0	090	112.57
853-012C	1-1/4	20	0	090	127.35
853-015C	1-1/2	15	0	090	178.25
853-020C	2	10	0	090	187.27
853-025C	2-1/2	10	0	090	283.28
853-030C	3	10	0	090	352.21
853-040C	4	8	0	090	477.03
853-060C	6	5	0	090	800.22
853-080C	8	5	0	090	1484.29
853-100C	10	3	0	091	2676.32
853-120C	12	2	0	091	4496.20
853-140CF	14	1	0	097	5225.17
853-160CF	16	1	0	097	8101.61
853-180CF	18	1	0	097	9987.20
853-200CF	20	1	0	097	10701.60
853-240CF	24	1	0	097	13021.66

Flange Van Stone Style with Plastic Ring

Socket

1/2" - 18" molded - 150 psi = maximum internal pressure rating @ 73°F (23°C)

18" - 24" fabricated - 50 psi = maximum internal pressure rating @ 73°F (23°C)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
854-005C	1/2	25	0	090	55.93
854-007C	3/4	25	0	090	57.20
854-010C	1	15	0	090	62.43
854-012C	1-1/4	15	0	090	76.23
854-015C	1-1/2	20	0	090	84.69
854-020C	2	10	0	090	102.52
854-025C	2-1/2	10	0	090	212.42
854-030C	3	10	0	090	222.40
854-040C	4	5	0	090	300.35
854-050C	5	5	0	090	511.76
854-060C	6	5	0	090	511.76
854-080C	8	2	0	090	1539.87
854-100C	10	2	0	091	3706.95
854-120C	12	2	0	091	5562.42
854-140C	14	1	0	095	6267.92
854-160C	16	1	0	095	7834.93
854-180C	18	1	0	095	12719.09

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange Van Stone Style with Plastic Ring (continued)

Socket

854-180CFP	18	1	0	097	14181.20
854-200CFP	20	1	0	097	12598.69
854-240CFP	24	1	0	097	16242.21

Flange Van Stone Style with Plastic Ring

Spigot

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
856-005C	1/2	25	0	090	64.66
856-007C	3/4	25	0	090	69.44
856-010C	1	15	0	090	78.82
856-012C	1-1/4	15	0	090	97.55
856-015C	1-1/2	15	0	090	107.87
856-020C	2	10	0	090	150.98
856-025C	2-1/2	10	0	090	236.49
856-030C	3	10	0	090	258.95
856-040C	4	5	0	090	266.49
856-060C	6	4	0	090	581.82
856-080C	8	2	0	090	1185.99
856-100C	10	2	0	091	3982.48
856-120C	12	2	0	091	5982.28
856-140CFP	14	1	0	097	6365.17
856-160CFP	16	1	0	097	7884.74
856-180CFP	18	1	0	097	7810.42
856-200CFP	20	1	0	097	9308.59
856-240CFP	24	1	0	097	16488.35

Flange Van Stone Style with Plastic Solid Ring

Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

S854-030C	3	10	0	090	317.66
S854-040C	4	5	0	090	429.15
S854-060C	6	4	0	090	731.06
S854-080C	8	2	0	090	2199.71
S854-100C	10	2	0	091	5295.68
S854-120C	12	2	0	091	7946.33

Flange Van Stone Style Class 300 Bolt Pattern Fabricated with Plastic Ring

Socket

Molded with fabricated ring - 150 psi = maximum internal pressure rating @ 73°F (23°C)

854-005CL300C	1/2	25	0	097	425.59
854-007CL300C	3/4	25	0	097	570.22
854-010CL300C	1	15	0	097	695.29
854-012CL300C	1-1/4	15	0	097	738.66
854-015CL300C	1-1/2	20	0	097	766.99
854-020CL300C	2	10	0	097	852.03
854-025CL300C	2-1/2	10	0	097	1013.86

Schedule 80 CPVC Product
Pipe Flanges & Van Stone Style Flange Replacement Split Rings



Pipe Flanges

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange Van Stone Style Class 300 Bolt Pattern Fabricated with Plastic Ring (continued)

Socket

854-030CL300C	3	10	0	097	1297.13
854-040CL300C	4	5	0	097	1737.61
854-060CL300C	6	4	0	097	3281.23
854-080CL300C	8	3	0	097	3775.65
854-100CL300C	10	2	0	097	4268.93
854-120CL300C	12	2	0	097	5333.19
854-140CL300C	14	1	0	097	5923.23
854-160CL300C	16	1	0	097	6232.44

Flange Van Stone Style with Plastic Ring

Fipt

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

855-005C	1/2	25	0	090	78.20
855-007C	3/4	25	0	090	94.77
855-010C	1	15	0	090	103.45
855-012C	1-1/4	15	0	090	142.44
855-015C	1-1/2	20	0	090	152.06
855-020C	2	10	0	090	154.93
855-025C	2-1/2	10	0	090	249.39
855-030C	3	10	0	090	249.39
855-040C	4	5	0	090	419.37
855-060C ¹	6	1	0	090	656.43
855-060CF	6	1	2	097	583.56
855-080C ¹	8	2	0	090	1008.95
855-080CF	8	1	2	097	896.84
855-100CF	10	1	2	097	1521.94
855-120CF	12	1	0	097	1926.71

¹ Flange assembled with molded Female Adapter

Flange Van Stone Style with Steel Ring

Socket

150 psi Maximum Internal Pressure Rating @73°F (23°C)

854-120CFS	12	1	0	097	1804.46
854-140CFS	14	1	0	098	2717.88
854-160CFS	16	1	0	097	3825.23
854-180CFS	18	1	0	097	4446.80
854-200CFS	20	1	0	097	5231.83
854-240CFS	24	1	0	097	8466.56

Flange One Piece Multi-Bolt Pattern*

ASTM Socket x Multi-bolt Pattern Ring

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

M851-100C	10	2	0	091	1787.65
M851-120C	12	2	0	091	2755.16

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange One Piece Multi-Bolt Pattern* (continued)

ASTM Socket x Multi-bolt Pattern Ring

Hubs fit 10" and 12" ASTM IPS pipe. Rings are manufactured to accept bolt patterns in size 10" and 12" in ANSI Class 150, B.S. 4504 PN10, B.S. 4504 PN16, B.S. 10 Table E for size 10". Consult Spears® Manufacturing Company Technical Services for additional information. Not for use with wafer valves.

Flange Van Stone Style with Plastic Ring ASTM

Socket x Multi-bolt Pattern Ring

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

M854-020C	2	10	0	090	102.52
M854-060C	6	4	0	090	511.76
M854-080C	8	2	0	090	1539.87

Flange Van Stone Style with PN 10/16 Drilling CPVC Ring

ASTM Socket x DIN PN 10/16 Drilling

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

854-030CDIN	3	10	0	090	222.40
854-040CDIN	4	5	0	090	300.35

* Hubs fit 3" or 4" ASTM IPS Pipe. Rings are manufactured to DIN 8063-4 PN 10 and PN 16 bolt patterns.

Van Stone Style Flange Replacement Split Rings
Application & Use of Van Stone Style Flange Replacement Split Rings

Designed for easy Van Stone style flange ring replacement in the event of system modification, repair, or improper assembly without having to remove existing flange hub. Split rings are made as a direct replacement of existing one-piece rings used on Spears® brand only of Van Stone style flanges with ANSI Class 150 bolt pattern plastic rings. Remove old ring to be replaced then simply place the split ring sections around hub and install flange bolts (not included) through special designed section overlap to hold in position. Install appropriate user supplied bolts, washers and gasket (see Flange Gasket and Bolt Hardware Kits in this catalog); torque to specifications according to normal flange assembly. Split rings are a set of either 2-pieces or 4-pieces (illustrated) sections depending on size, in regular PVC, Glass Filled PVC, or CPVC for flange type and sizes listed.

Flange Replacement Split Rings, CPVC

For Spears® Flanges with CPVC Rings

854-005-1SC	1/2	25	0	090	162.40
854-007-1SC	3/4	25	0	090	172.40



Van Stone Style Flange Replacement Split Rings & Flange Insulating Joints

Van Stone Style Flange Replacement Split Rings

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange Replacement Split Rings, CPVC (continued)

For Spears® Flanges with CPVC Rings

854-010-1SC	1	10	0	090	192.82
854-012-1SC	1-1/4	15	0	090	196.56
854-015-1SC	1-1/2	20	0	090	201.40
854-020-1SC	2	1	40	090	267.28
854-025-1SC	2-1/2	10	0	090	309.18
854-030-1SC	3	10	0	090	342.83
854-040-1SC	4	10	0	090	363.05
854-050-1SC	5	10	0	090	497.76
854-060-1SC	6	5	0	090	588.96
854-080-1SC	8	4	0	090	672.92
854-100-1SC	10	4	0	091	849.44
854-120-1SC	12	2	0	091	1052.80
854-140-1SC	14	2	0	091	1442.06
854-160-1SC	16	1	0	095	1791.43
854-180-1SC	18	1	0	095	1945.72
854-200-1SC	20	1	0	097	12403.99
854-240-1SC	24	1	0	097	12652.88

Fits 854-xxxC Socket, 855-xxxC Threaded, and 856-xxxC Spigot hub configurations

Flange Insulating Joints

Flange Insulating Joints - Class 150 Bolt Pattern

PP Flange Spacer with PVC Bolt Isolators



Size = Nominal Flange Diameter x Thickness (in.)
For Dielectric Insulation Between Dissimilar Metal Flanges
300 psi Maximum Internal Pressure Rating @ 73°F (23°C)

IJ-030-010P	3X1	1	0	016	952.57
IJ-040-010P	4X1	1	0	016	1064.32
IJ-060-010P	6X1	1	0	016	1265.05
IJ-080-010P	8X1	1	0	016	1468.18
IJ-100-010P	10X1	1	0	016	2984.07
IJ-120-010P	12X1	1	0	016	3232.06
IJ-140-010P	14X1	1	0	016	4188.00
IJ-160-010P	16X1	1	0	016	5321.77
IJ-180-010P	18X1	1	0	016	7123.65
IJ-200-010P	20X1	1	0	016	9196.51
IJ-240-010P	24X1	1	0	016	16179.93

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange Insulating Joints - Class 300 Bolt Pattern

PP Flange Spacer with PVC Bolt Isolators



Size = Nominal Flange Diameter x Thickness (in.)
For Dielectric Insulation Between Dissimilar Metal Flanges
300 psi Maximum Internal Pressure Rating @ 73°F (23°C)

IJ300-030-010P	3X1	1	0	016	1403.26
IJ300-040-010P	4X1	1	0	016	1560.76
IJ300-060-010P	6X1	1	0	016	2390.61
IJ300-080-010P	8X1	1	0	016	2982.38
IJ300-100-010P	10X1	1	0	016	4947.62
IJ300-120-010P	12X1	1	0	016	6501.73
IJ300-140-010P	14X1	1	0	016	8190.59
IJ300-160-010P	16X1	1	0	016	8733.80
IJ300-180-010P	18X1	1	0	016	10915.19
IJ300-200-010P	20X1	1	0	016	12646.18
IJ300-240-010P	24X1	1	0	016	15527.25

Flange Bolt Kits



Flange Bolt Kits

Bolt Kit Selection Guide



Order Gaskets & Bolt Kits Separately

- Kit Contains All Bolts, Nuts, & Flat Washers for Specified Flange Size
- For Connecting Two (2) Back To Back Spears® Flanges
- Pre-coated, Anti-seize Lubricated Bolts
- Available in Zinc Coated Steel, Type 304 Stainless Steel or Type 316 Stainless Steel

Flange Size	Bolts ¹ Per Kit	Diameter (in.-TPI)	Length (in.)	Hardware Kit Part Number		
				Zinc	316 SS	304 SS
1/2	4	1/2-13	2	HK-005	HK1-005	HK2-005
3/4	4	1/2-13	2-1/4	HK-007	HK1-007	HK2-007
1, 1-1/4 & 1-1/2	4	1/2-13	2-1/2	HK-015	HK1-015	HK2-015
2	4	5/8-11	3	HK-020	HK1-020	HK2-020
2-1/2	4	5/8-11	3-1/4	HK-025	HK1-025	HK2-025
3	4	5/8-11	3-1/2	HK-030	HK1-030	HK2-030
4	8	5/8-11	3-1/2	HK-040	HK1-040	HK2-040
5	8	3/4-10	3-1/2	HK-050	HK1-050	HK2-050
6 & 8	8	3/4-10	4-1/2	HK-080	HK1-080	HK2-080
10 & 12	12	7/8-9	5	HK-120	HK1-120	HK2-120

¹ - Each Bolt includes Nut & two (2) Flat Washers

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange Bolt Hardware Kits - Zinc Plated Steel

For Connection of (2) Two Back to Back Spears® Van Stone Flanges
Includes - Bolts, Nuts & Flat Washers



HK-005	1/2	1	10	017	20.77
HK-007	3/4	1	10	017	25.91
HK-015	1, 1-1/4 & 1-1/2	1	10	017	38.98
HK-020	2	1	10	017	52.18
HK-025	2-1/2	1	10	017	62.54
HK-030	3	1	10	017	71.99
HK-040	4	1	5	017	149.15
HK-050	5	1	5	017	165.83
HK-080	6 & 8	1	0	017	194.36
HK-120	10 & 12	1	0	017	262.97

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Flange Bolt Hardware Kits - Type 316 Stainless Steel

For Connection of (2) Two Back to Back Spears® Van Stone Flanges
Includes - Bolts, Nuts & Flat Washers



HK1-005	1/2	1	10	017	62.27
HK1-007	3/4	1	10	017	89.65
HK1-015	1, 1-1/4 & 1-1/2	1	10	017	98.78
HK1-020	2	1	10	017	118.80
HK1-025	2-1/2	1	10	017	127.34
HK1-030	3	1	10	017	168.02
HK1-040	4	1	5	017	336.94
HK1-050	5	1	5	017	439.49
HK1-080	6 & 8	1	0	017	551.43
HK1-120	10 & 12	1	0	017	1121.89

Flange Bolt Hardware Kits - Type 304 Stainless Steel

For Connection of (2) Two Back to Back Spears® Van Stone Flanges
Includes - Bolts, Nuts, & Flat Washers



HK2-005	1/2	1	10	017	54.46
HK2-007	3/4	1	10	017	77.69
HK2-015	1, 1-1/4 & 1-1/2	1	10	017	91.51
HK2-020	2	1	10	017	107.64
HK2-025	2-1/2	1	10	017	114.17
HK2-030	3	1	10	017	141.75
HK2-040	4	1	5	017	283.49
HK2-050	5	1	5	017	298.81
HK2-080	6 & 8	1	0	017	392.88
HK2-120	10 & 12	1	0	017	696.36

Flange Bolt Hardware Kits - Zinc Plated Steel

For Connection of (2) Two Back to Back Spears® One Piece Flanges
Includes- Bolts, Nuts & Flat Washers



HK-005	1/2	1	10	017	20.77
HK-007	3/4	1	10	017	25.91
HK-015	1, 1-1/4 & 1-1/2	1	10	017	38.98
HK-020	2	1	10	017	52.18
HK-025	2-1/2	1	10	017	62.54
HK-030	3	1	10	017	71.99
HK-040	4	1	5	017	149.15
HK-050	5	1	5	017	165.83
HK-080	6 & 8	1	0	017	194.36
HK-120L	10 & 12	1	4	017	323.50



Schedule 80 CPVC Product
Flange Bolt Kits & Flange Gaskets - Full-Faced

Flange Bolt Kits

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

**Flange Bolt Hardware Kits - Type 316
Stainless Steel**

**For Connection of (2) Two Back to Back Spears® One Piece Flanges
Includes - Bolts, Nuts & Flat Washers**



HK1-005	1/2	1	10	017	62.27
HK1-007	3/4	1	10	017	89.65
HK1-015	1, 1-1/4 & 1-1/2	1	10	017	98.78
HK1-020	2	1	10	017	118.80
HK1-025	2-1/2	1	10	017	127.34
HK1-030	3	1	10	017	168.02
HK1-040	4	1	5	017	336.94
HK1-050	5	1	5	017	439.49
HK1-080	6 & 8	1	0	017	551.43
HK1-120L	10&12	1	4	017	1267.94


**Flange Bolt Hardware Kits - Type 304
Stainless Steel**

**For Connection of (2) Two Back to Back Spears® One Piece Flanges
Includes - Bolts, Nuts, & Flat Washers**



HK2-005	1/2	1	10	017	54.46
HK2-007	3/4	1	10	017	77.69
HK2-015	1, 1-1/4 & 1-1/2	1	10	017	91.51
HK2-020	2	1	10	017	107.64
HK2-025	2-1/2	1	10	017	114.17
HK2-030	3	1	10	017	141.75
HK2-040	4	1	5	017	283.49
HK2-050	5	1	5	017	298.81
HK2-080	6 & 8	1	0	017	392.88
HK2-120L	10&12	1	4	017	819.50

**Flange Gaskets - Full-Faced
Gasket Selection Guide**



Flange Size	Bolt Holes	Gasket Part Number		
		Buna-N	EPDM	FKM
1/2	4	GK1-005	GK2-005	GK3-005
3/4	4	GK1-007	GK2-007	GK3-007
1	4	GK1-010	GK2-010	GK3-010
1-1/4	4	GK1-012	GK2-012	GK3-012
1-1/2	4	GK1-015	GK2-015	GK3-015
2	4	GK1-020	GK2-020	GK3-020
2-1/2	4	GK1-025	GK2-025	GK3-025
3	4	GK1-030	GK2-030	GK3-030
4	8	GK1-040	GK2-040	GK3-040
5	8	GK1-050	GK2-050	GK3-050
6	8	GK1-060	GK2-060	GK3-060
8	8	GK1-080	GK2-080	GK3-080
10	12	GK1-100	GK2-100	GK3-100
12	12	GK1-120	GK2-120	GK3-120

Order Gaskets & Bolt Kits Separately

- 1/8" Full-Face design with ANSI Class 150 Bolt Patterns
- Pressure rated to 150 psi @ 73°F
- Available in Buna-N, EPDM, or FKM

Flange Gaskets - Full-Faced Buna-N

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
GK1-005	1/2	1	25	017	6.67
GK1-007	3/4	1	25	017	7.62
GK1-010	1	1	25	017	8.20
GK1-012	1-1/4	1	25	017	9.04
GK1-015	1-1/2	1	25	017	9.36
GK1-020	2	1	25	017	12.94
GK1-025	2-1/2	1	25	017	16.91
GK1-030	3	1	25	017	20.45
GK1-040	4	1	25	017	31.37
GK1-050	5	1	25	017	33.23
GK1-060	6	1	25	017	33.78
GK1-080	8	1	25	017	44.20
GK1-100	10	1	25	017	66.15
GK1-120	12	1	25	017	98.99
GK1-140	14	1	25	017	137.13
GK1-160	16	1	25	017	220.53

Schedule 80 CPVC Product
Flange Gaskets - Full-Faced & CPVC Flange Cut-in Kit



Flange Gaskets - Full-Faced

Flange Gaskets - Full-Faced Buna-N (continued)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
GK1-180	18	1	25	017	325.65
GK1-240	24	1	25	017	431.76

Flange Gaskets - Full-Faced EPDM

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
GK2-005	1/2	1	25	017	8.84
GK2-007	3/4	1	25	017	9.40
GK2-010	1	1	25	017	9.82
GK2-012	1-1/4	1	25	017	10.32
GK2-015	1-1/2	1	25	017	11.07
GK2-020	2	1	25	017	14.12
GK2-025	2-1/2	1	25	017	18.18
GK2-030	3	1	25	017	22.63
GK2-040	4	1	25	017	33.36
GK2-050	5	1	25	017	44.93
GK2-060	6	1	25	017	45.57
GK2-080	8	1	25	017	67.39
GK2-100	10	1	25	017	73.86
GK2-120	12	1	25	017	102.43
GK2-140	14	1	25	017	171.77
GK2-160	16	1	25	017	232.44
GK2-180	18	1	25	017	350.43
GK2-200	20	1	25	017	408.29
GK2-240	24	1	25	017	452.12

Flange Gaskets - Full-Faced FKM

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
GK3-005	1/2	1	25	017	31.55
GK3-007	3/4	1	25	017	37.44
GK3-010	1	1	25	017	47.16
GK3-012	1-1/4	1	5	017	55.91
GK3-015	1-1/2	1	25	017	76.18
GK3-020	2	1	25	017	102.18
GK3-025	2-1/2	1	25	017	160.77
GK3-030	3	1	25	017	172.38
GK3-040	4	1	25	017	231.31
GK3-050	5	1	25	017	275.08
GK3-060	6	1	25	017	337.20
GK3-080	8	1	25	017	452.88
GK3-100	10	1	25	017	538.48
GK3-120	12	1	25	017	756.41
GK3-140	14	1	25	017	863.87
GK3-160	16	1	25	017	987.36
GK3-180	18	1	25	017	1070.77
GK3-240	24	1	10	017	1573.67

CPVC Flange Cut-in Kit

When planned system changes are needed, system downtime can be a major concern. Spears® Flange Cut-in Kit minimizes downtime for actual cut-in to allow new connection in just minutes. Kit provides all necessary components to create a flanged joint for connection to system alterations in just minutes. Special Flange Hub can be cemented to piping and allowed to cure before shutting down and cutting into system. This allows immediate joining to mating flange (included) that can also be pre-assembled to desired alteration piping.

Kit includes special Split Flange Socket Hub, O-ring Sealed Hub Body, Stainless Steel Clamp, Split Ring, Full-Faced EPDM or FKM Gasket, Mating Flange Hub & Ring, and complete set of Stainless Steel Bolts, Flat Washers and anti-seize Brass Nuts to make the final joint. Available for IPS Pipe Sizes 1-1/2" - 12".



Pressure Rated to 150 psi @ 73°F (22°C)
 Maximum Service Temperature
 PVC = 140°F (60°C)
 CPVC = 200°F (93°C)
 Temperature/Pressure De-ratings Apply

Flange Cut-in Kit

Size	EPDM Gasket	FKM Gasket	Std Pk	Mstr Pk	Prod Code
1-1/2	FCKE-015C 1284.36	FCKV-015C 1366.11	1	4	017
2	FCKE-020C 1434.55	FCKV-020C 1513.67	1	4	017
2-1/2	FCKE-025C 1528.62	FCKV-025C 1654.75	1	0	017
3	FCKE-030C 1665.25	FCKV-030C 1729.26	1	0	017
4	FCKE-040C 2547.54	FCKV-040C 2646.52	1	0	017
6	FCKE-060C 4125.81	FCKV-060C 4699.94	1	0	017
8	FCKE-080C 5235.80	FCKV-080C 5964.92	1	0	017
10	FCKE-100C 8479.92	FCKV-100C 8762.18	1	0	017
12	FCKE-120C 10090.36	FCKV-120C 10532.99	1	0	017