




# Water Suction

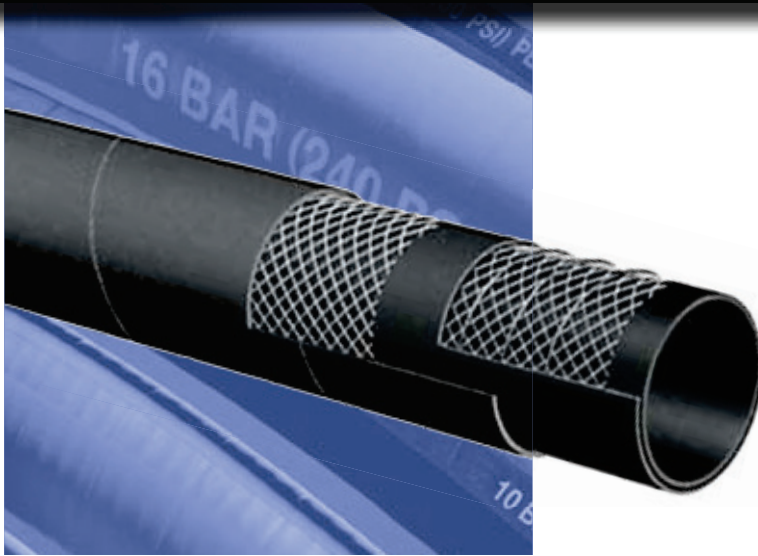

## T202AA 150 PSI EPDM General Purpose Water S & D Hose

FOR APPLICATIONS INVOLVING  
INDUSTRIAL ACID CHEMICALS AND  
ALCOHOLS, PLEASE REFER TO T505OG  
AND T509OE CHEMICAL HOSES

**Applications:**

Suction and discharge of non-corrosive liquids for irrigation, construction, fertilizers and lasso acid solutions.

**Cover:**

Black EPDM – abrasion and ozone resistant.

**Reinforcement:**

Spiralled high tensile textile cords and highly flexible steel helix wire/wires.

**Tube:**

Black EPDM.

**Working Pressure:**

Constant Pressure – 10 Bar (150 PSI)

**Temperature Range:**

-22°F (-30°C) to 176°F (+80°C)

**Branding:**

ALFAGOMMA – ITALY – T202 10 BAR (150 PSI)  
GENERAL PURPOSE EPDM (in green letters)

**Standard Length:**

100 feet: 1" through 6"

20, 50 feet: 5"

20, 25, 50 feet: 6"

20, 25 feet: 8"

20 feet: 10" through 12"

### Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T202AA100	1	25	1.38	35	150	30	4	0.47
T202AA125	1 1/4	32	1.65	42	150	30	5	0.56
T202AA150	1 1/2	38	1.89	48	150	30	6	0.64
T202AA200	2	51	2.40	61	150	30	8	0.84
T202AA250	2 1/2	63	2.95	75	150	27	10	1.20
T202AA300	3	76	3.46	88	150	27	12	1.44
T202AA350	3 1/2	90	4.02	102	150	27	14	1.82
T202AA400	4	102	4.49	114	150	27	16	2.03
T202AA500	5	127	5.55	141	150	24	25	3.18
T202AA600	6	152	6.54	166	150	24	30	4.01
T202AA800	8	203	8.70	221	150	21	40	6.59
T202AA1000	10	254	10.71	272	150	18	50	9.03
T202AA1200	12	305	12.87	327	150	18	61	12.54

**COUPLING SUGGESTIONS**

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.



Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.